ROLLCO LINEAR SOLUTIONS YOUR WAY

FTSU

Aluminium with mounting holes.

Standard section length L = 4000 mm. Lengths other than standard (Lmax = 4000 mm) are also available on request.

Support rails can be supplied upon request, with or without mounting holes. No anodizing in holes.


Dimensions in mm.


Note: The shaft is not included, please order separately.

Material: Aluminium



Dimensions



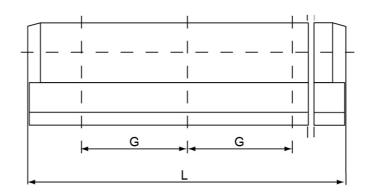

| Designation | Remark | G | А | В | Н | D | К | F | С |
|-------------|--|-----|----|------|----|----|-----|---|------|
| FTSU16G | Standard section length L = 4000 mm | 100 | 14 | 7 | 18 | 16 | M5 | 3 | 5.5 |
| FTSU20G | Standard section length L = 4000 mm | 100 | 17 | 8.5 | 22 | 20 | M6 | 3 | 6.6 |
| FTSU25G | Standard section length L = 4000 mm | 120 | 21 | 10.5 | 26 | 25 | M8 | 3 | 9 |
| FTSU30G | Standard section length L = 4000 mm | 150 | 23 | 11.5 | 30 | 30 | M10 | 3 | 11 |
| FTSU40G | Standard section length L = 4000 mm | 200 | 40 | 15 | 39 | 40 | M10 | 4 | 13.5 |

| Designation | I | J |
|-------------|------|------|
| FTSU16G | 7 | 19 |
| FTSU20G | 8.1 | 23 |
| FTSU25G | 10.3 | 28.5 |
| FTSU30G | 11 | 32 |
| FTSU40G | 15 | 39.5 |

Rollco AB • Box 22234 • 250 24 Helsingborg • Sverige Tel. +46 42 15 00 40 • info@rollco.se • org.nr 556574-0353