

PNCE

The electric cylinder is based on the standard ISO 15552. Its outer design and dimensions are very similar to pneumatic cylinders.

The precision ball screw with reduced backlash of the ball nut and non-rotating piston rod offers high performance. Preload is available on request.



The excellent sealing of the components in the cylinder protects the interior of the cylinder from dust, water and other contaminants.

Note!

All the data of the dynamic load capacities (ball screw drive) stated in the table are theoretical without considering any safety factor. The safety factor depends on the application and its requested safety and service life. We recommend a minimum safety factor $f_s = 5,0$, where f_s is defined as $f_s = C / F_m$. (Dynamic load capacity refers to the capacity of the ball screw drive.)

The max. axial load value needs to be considered when using the piston rod or mounting attachments' accessories.

Maximum travel speed depends on the absolute stroke of the PNCE.

Contact us for further information.

Dimensions in mm.


Axial Backlash (mm): < ±0.02

Max. Acceleration (m/s): 20

Operating Temperature (°C): 0 ~ +60

Protection Class: IP40, IP65

- 1. Front cap
- 2. Drive cap
- 3. Smooth cylinder profile
- 4. Hex nut
- 5. Piston rod (stainless steel) with an anti-rotation device
- 6. Piston rod seal
- 7. Pressure compensation
- 8. Lubrication nipple
- 9. Connection for pressure compensation

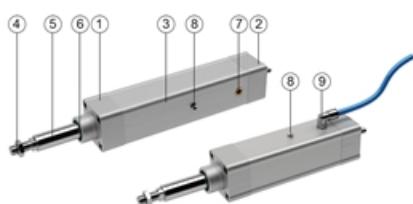

General Data

* The moved mass is already considered in the equation for calculating the mass of the electric cylinder m_{PNCE} and the mass moment of inertia J_{PNCE} . The moved mass includes the mass of the piston rod with the internal anti-rotation device and ball nut.

m_{load}	Applied mass to be moved	[kg]
E	Extended piston rod	[mm]
Absolute stroke		[mm]

Designation	Ball Screw (d x l)	Dynamic Load Capacity C (N)	Max. Axial Load Fmax (N)	Max. Drive Torque M _p (Nm)	Max. Travel Speed Vmax (m/s)
PNCE 32 - 12x5	12 × 5 mm	5000	2540	2.2	0.48
PNCE 32 - 12x10	12 × 10 mm	3800	1270	2.2	0.97
PNCE 40 - 16x5	16 × 5 mm	13150	6020	5.3	0.35
PNCE 40 - 16x10	16 × 10 mm	11550	3010	5.3	0.7
PNCE 40 - 16x16	16 × 16 mm	8170	1880	5.3	1.12
PNCE 50 - 20x5	20 × 5 mm	14800	14600	12.9	0.28
PNCE 50 - 20x10	20 × 10 mm	15900	7830	13.9	0.55
PNCE 50 - 20x20	20 × 20 mm	16250	3900	13.9	1.1
PNCE 50 - 20x50	20 × 50 mm	13000	1560	13.9	2.5
PNCE 63 - 25x5	25 × 5 mm	16700	16500	14.6	0.23
PNCE 63 - 25x10	25 × 10 mm	15800	15800	28	0.45
PNCE 63 - 25x25	25 × 25 mm	16700	7940	35.1	1.13
PNCE 80 - 32x5	32 × 5 mm	18850	18850	16.7	0.18
PNCE 80 - 32x10	32 × 10 mm	37000	25000	44.2	0.5
PNCE 80 - 32x20	32 × 20 mm	22950	17160	60.7	1
PNCE 80 - 32x32	32 × 32 mm	15500	10725	60.7	1.6
PNCE 100 - 40x5	40 × 5 mm	23800	23800	21	0.18
PNCE 100 - 40x10	40 × 10 mm	38000	29000	51.3	0.37
PNCE 100 - 40x20	40 × 20 mm	33300	29000	102.6	0.73
PNCE 100 - 40x40	40 × 40 mm	35000	22980	162.6	1.47

Designation	Max. Rotational Speed nmax (min ⁻¹)	No Load Torque M _o (Nm)	Min. Stroke Smin (mm)	Max. Stroke Smax (mm)	Moved Mass (kg)	Mass of the Electric Cylinder mPNCE (kg)
PNCE 32 - 12x5	5800	0.1	30	800	$0.32 + 0.0010 \times (\text{Absolute stroke} + E)$	$1.10 + 0.0043 \times (\text{Absolute stroke} + E)$
PNCE 32 - 12x10	5800	0.15	30	800	$0.32 + 0.0010 \times (\text{Absolute stroke} + E)$	$1.10 + 0.0043 \times (\text{Absolute stroke} + E)$
PNCE 40 - 16x5	4200	0.15	40	900	$0.44 + 0.0007 \times (\text{Absolute stroke} + E)$	$1.45 + 0.0051 \times (\text{Absolute stroke} + E)$
PNCE 40 - 16x10	4200	0.2	35	900	$0.44 + 0.0007 \times (\text{Absolute stroke} + E)$	$1.45 + 0.0051 \times (\text{Absolute stroke} + E)$
PNCE 40 - 16x16	4200	0.25	35	900	$0.44 + 0.0007 \times (\text{Absolute stroke} + E)$	$1.45 + 0.0051 \times (\text{Absolute stroke} + E)$
PNCE 50 - 20x5	3300	0.3	50	1000	$0.95 + 0.0012 \times (\text{Absolute stroke} + E)$	$2.50 + 0.0073 \times (\text{Absolute stroke} + E)$

General Data

Designation	Max. Rotational Speed nmax (min ⁻¹)	No Load Torque M _o (Nm)	Min. Stroke Smin (mm)	Max. Stroke Smax (mm)	Moved Mass (kg)	Mass of the Electric Cylinder mPNCE (kg)
PNCE 50 - 20x10	3300	0.35	55	1000	0.95 + 0.0012 × (Absolute stroke + E)	2.50 + 0.0073 × Absolute stroke + 0.0012 × E
PNCE 50 - 20x20	3300	0.4	50	1000	0.95 + 0.0012 × (Absolute stroke + E)	2.50 + 0.0073 × Absolute stroke + 0.0012 × E
PNCE 50 - 20x50	3000	0.5	30	1000	0.88 + 0.0012 × (Absolute stroke + E)	2.43 + 0.0073 × Absolute stroke + 0.0012 × E
PNCE 63 - 25x5	2700	0.5	40	1200	1.00 + 0.0011 × (Absolute stroke + E)	3.05 + 0.0097 × Absolute stroke + 0.0011 × E
PNCE 63 - 25x10	2700	0.55	40	1200	1.00 + 0.0011 × (Absolute stroke + E)	3.05 + 0.0097 × Absolute stroke + 0.0011 × E
PNCE 63 - 25x25	2700	0.65	30	1200	0.98 + 0.0011 × (Absolute stroke + E)	3.03 + 0.0097 × Absolute stroke + 0.0011 × E
PNCE 80 - 32x5	2150	0.65	60	1500	2.15 + 0.0028 × (Absolute stroke + E)	6.48 + 0.0156 × Absolute stroke + 0.0028 × E
PNCE 80 - 32x10	3000	0.7	60	1500	2.15 + 0.0028 × (Absolute stroke + E)	6.48 + 0.0156 × Absolute stroke + 0.0028 × E
PNCE 80 - 32x20	3000	0.75	70	1500	2.15 + 0.0028 × (Absolute stroke + E)	6.48 + 0.0156 × Absolute stroke + 0.0028 × E
PNCE 80 - 32x32	3000	0.9	70	1500	2.15 + 0.0028 × (Absolute stroke + E)	6.48 + 0.0156 × Absolute stroke + 0.0028 × E
PNCE 100 - 40x5	2200	1	45	1500	3.21 + 0.0047 × (Absolute stroke + E)	10.12 + 0.0245 × Absolute stroke + 0.0047 × E
PNCE 100 - 40x10	2200	1.1	55	1500	3.21 + 0.0047 × (Absolute stroke + E)	10.12 + 0.0245 × Absolute stroke + 0.0047 × E
PNCE 100 - 40x20	2200	1.2	65	1500	3.21 + 0.0047 × (Absolute stroke + E)	10.12 + 0.0245 × Absolute stroke + 0.0047 × E
PNCE 100 - 40x40	2200	1.4	80	1500	3.54 + 0.0047 × (Absolute stroke + E)	10.61 + 0.0245 × Absolute stroke + 0.0047 × E

Designation	Mass Moment of Inertia JPNCE (10 ⁻⁶ kg m ²)
PNCE 32 - 12x5	2.15 + 0.0128 × Absolute stroke + 0.0006 × E + 0.6333 × mload
PNCE 32 - 12x10	2.75 + 0.0147 × Absolute stroke + 0.0025 × E + 2.5330 × mload


General Data

Designation	Mass Moment of Inertia JPNCE (10^{-6} kg m 2)
PNCE 40 - 16x5	$4.50 + 0.0395 \times \text{Absolute stroke} + 0.0004 \times E + 0.6333 \times mload$
PNCE 40 - 16x10	$5.35 + 0.0408 \times \text{Absolute stroke} + 0.0018 \times E + 2.5330 \times mload$
PNCE 40 - 16x16	$7.10 + 0.0436 \times \text{Absolute stroke} + 0.0046 \times E + 6.4846 \times mload$
PNCE 50 - 20x5	$17.75 + 0.0817 \times \text{Absolute stroke} + 0.0007 \times E + 0.6333 \times mload$
PNCE 50 - 20x10	$19.55 + 0.0839 \times \text{Absolute stroke} + 0.0030 \times E + 2.5330 \times mload$
PNCE 50 - 20x20	$26.75 + 0.0928 \times \text{Absolute stroke} + 0.0118 \times E + 10.1321 \times mload$
PNCE 50 - 20x50	$73.80 + 0.1549 \times \text{Absolute stroke} + 0.0740 \times E + 63.3257 \times mload$
PNCE 63 - 25x5	$32.55 + 0.2358 \times \text{Absolute stroke} + 0.0007 \times E + 0.6333 \times mload$
PNCE 63 - 25x10	$34.45 + 0.2378 \times \text{Absolute stroke} + 0.0028 \times E + 2.5330 \times mload$
PNCE 63 - 25x25	$47.30 + 0.2523 \times \text{Absolute stroke} + 0.0172 \times E + 15.8314 \times mload$
PNCE 80 - 32x5	$118.14 + 0.6514 \times \text{Absolute stroke} + 0.0018 \times E + 0.6333 \times mload$
PNCE 80 - 32x10	$122.23 + 0.6567 \times \text{Absolute stroke} + 0.0071 \times E + 2.5330 \times mload$
PNCE 80 - 32x20	$138.60 + 0.6781 \times \text{Absolute stroke} + 0.0285 \times E + 10.1321 \times mload$
PNCE 80 - 32x32	$172.65 + 0.7227 \times \text{Absolute stroke} + 0.0731 \times E + 25.9382 \times mload$

General Data

Designation	Mass Moment of Inertia JPNCE (10^{-6} kg m 2)
PNCE 100 - 40x5	$342.17 + 1.6613 \times \text{Absolute stroke} + 0.0030 \times E + 0.6333 \times mload$
PNCE 100 - 40x10	$348.27 + 1.6701 \times \text{Absolute stroke} + 0.0118 \times E + 2.5330 \times mload$
PNCE 100 - 40x20	$372.67 + 1.7056 \times \text{Absolute stroke} + 0.0473 \times E + 10.1321 \times mload$
PNCE 100 - 40x40	$483.41 + 1.8476 \times \text{Absolute stroke} + 0.1893 \times E + 40.5285 \times mload$

Dimensions

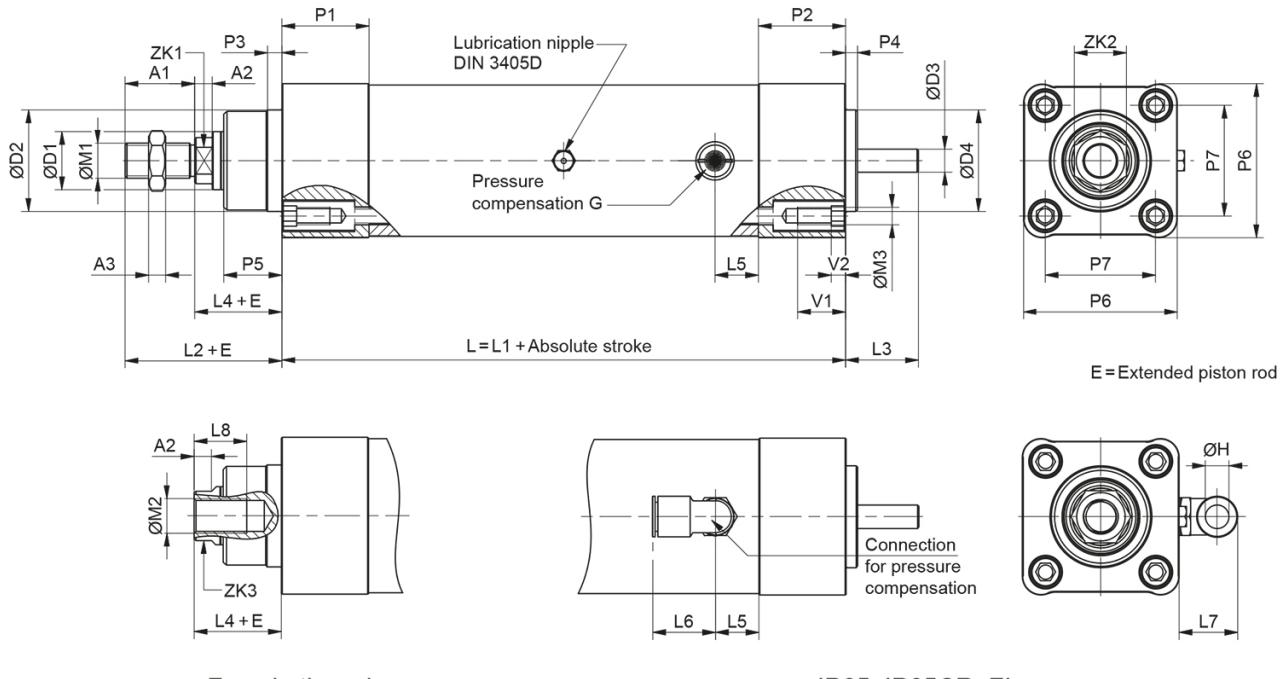

Female thread

IP65, IP65CR, FI

Designation	L1	L2	L3	L4	L5	L6	L7	L8	P1
PNCE 32 - 12x5	136 (+0.2/-1.4)	48	21	26 (+1.9/-0.8)	15	22.5	20	15	30
PNCE 32 - 12x10	136 (+0.2/-1.4)	48	21	26 (+1.9/-0.8)	15	22.5	20	15	30
PNCE 40 - 16x5	144 (+0.2/-1.4)	54	25	30 (+1.9/-0.8)	15	22.5	20	18	30
PNCE 40 - 16x10	144 (+0.2/-1.4)	54	25	30 (+1.9/-0.8)	15	22.5	20	18	30
PNCE 40 - 16x16	144 (+0.2/-1.4)	54	25	30 (+1.9/-0.8)	15	22.5	20	18	30
PNCE 50 - 20x5	180 (+0.2/-1.4)	69	32	37 (+1.9/-0.8)	15	22.5	20	25	36
PNCE 50 - 20x10	180 (+0.2/-1.4)	69	32	37 (+1.9/-0.8)	15	22.5	20	25	36
PNCE 50 - 20x20	180 (+0.2/-1.4)	69	32	37 (+1.9/-0.8)	15	22.5	20	25	36
PNCE 50 - 20x50	180 (+0.2/-1.4)	69	32	37 (+1.9/-0.8)	15	22.5	20	25	36
PNCE 63 - 25x5	171 (+0.2/-1.4)	69	38	37 (+1.9/-0.8)	15	22.5	20	25	38
PNCE 63 - 25x10	171 (+0.2/-1.4)	69	38	37 (+1.9/-0.8)	15	22.5	20	25	38
PNCE 63 - 25x25	171 (+0.2/-1.4)	69	38	37 (+1.9/-0.8)	15	22.5	20	25	38
PNCE 80 - 32x5	204 (+0.2/-1.4)	86	40	46 (+1.9/-0.8)	15	22.5	20	30	40
PNCE 80 - 32x10	204 (+0.2/-1.4)	86	40	46 (+1.9/-0.8)	15	22.5	20	30	40
PNCE 80 - 32x20	204 (+0.2/-1.4)	86	40	46 (+1.9/-0.8)	15	22.5	20	30	40

Dimensions

Designation	L1	L2	L3	L4	L5	L6	L7	L8	P1
PNCE 80 - 32x32	204 (+0.2/-1.4)	86	40	46 (+1.9/-0.8)	15	22.5	20	30	40
PNCE 100 - 40x5	224 (+0.2/-1.4)	91	50	46 (+1.9/-0.8)	15	22.5	20	30	42
PNCE 100 - 40x10	224 (+0.2/-1.4)	91	50	51 (+1.9/-0.8)	25	28.5	28	30	42
PNCE 100 - 40x20	224 (+0.2/-1.4)	91	50	51 (+1.9/-0.8)	25	28.5	28	30	42
PNCE 100 - 40x40	239 (+0.2/-1.4)	91	50	51 (+1.9/-0.8)	25	28.5	28	30	42

Designation	P2	P3	P4	P5	P6	P7	G	D1	D2	D3
PNCE 32 - 12x5	30	5	4 (± 0.1)	18 (± 0.1)	47	32.5	G 1/8	$\varnothing 18$ (f8)	$\varnothing 30$ (d11)	$\varnothing 6$ (h7)
PNCE 32 - 12x10	30	5	4 (± 0.1)	18 (± 0.1)	47	32.5	G 1/8	$\varnothing 18$ (f8)	$\varnothing 30$ (d11)	$\varnothing 6$ (h7)
PNCE 40 - 16x5	30	5	4 (± 0.1)	20 (± 0.1)	54	38	G 1/8	$\varnothing 20$ (f8)	$\varnothing 35$ (d11)	$\varnothing 8$ (h7)
PNCE 40 - 16x10	30	5	4 (± 0.1)	20 (± 0.1)	54	38	G 1/8	$\varnothing 20$ (f8)	$\varnothing 35$ (d11)	$\varnothing 8$ (h7)
PNCE 40 - 16x16	30	5	4 (± 0.1)	20 (± 0.1)	54	38	G 1/8	$\varnothing 20$ (f8)	$\varnothing 35$ (d11)	$\varnothing 8$ (h7)
PNCE 50 - 20x5	37	5	4 (± 0.1)	25 (± 0.1)	65	46.5	G 1/8	$\varnothing 25$ (f8)	$\varnothing 40$ (d11)	$\varnothing 11$ (h7)
PNCE 50 - 20x10	37	5	4 (± 0.1)	25 (± 0.1)	65	46.5	G 1/8	$\varnothing 25$ (f8)	$\varnothing 40$ (d11)	$\varnothing 11$ (h7)
PNCE 50 - 20x20	37	5	4 (± 0.1)	25 (± 0.1)	65	46.5	G 1/8	$\varnothing 25$ (f8)	$\varnothing 40$ (d11)	$\varnothing 11$ (h7)
PNCE 50 - 20x50	37	5	4 (± 0.1)	25 (± 0.1)	65	46.5	G 1/8	$\varnothing 25$ (f8)	$\varnothing 40$ (d11)	$\varnothing 11$ (h7)
PNCE 63 - 25x5	38	5	4 (± 0.1)	25 (± 0.1)	75	56.5	G 1/8	$\varnothing 30$ (f8)	$\varnothing 45$ (d11)	$\varnothing 15$ (h7)
PNCE 63 - 25x10	38	5	4 (± 0.1)	25 (± 0.1)	75	56.5	G 1/8	$\varnothing 30$ (f8)	$\varnothing 45$ (d11)	$\varnothing 15$ (h7)
PNCE 63 - 25x25	38	5	4 (± 0.1)	25 (± 0.1)	75	56.5	G 1/8	$\varnothing 30$ (f8)	$\varnothing 45$ (d11)	$\varnothing 15$ (h7)
PNCE 80 - 32x5	40	18	14 (± 0.1)	31 (± 0.1)	93	72	G 1/8	$\varnothing 40$ (f8)	$\varnothing 60$ (d11)	$\varnothing 18$ (h7)
PNCE 80 - 32x10	40	18	14 (± 0.1)	31 (± 0.1)	93	72	G 1/8	$\varnothing 40$ (f8)	$\varnothing 60$ (d11)	$\varnothing 18$ (h7)
PNCE 80 - 32x20	40	18	14 (± 0.1)	31 (± 0.1)	93	72	G 1/8	$\varnothing 40$ (f8)	$\varnothing 60$ (d11)	$\varnothing 18$ (h7)
PNCE 80 - 32x32	40	18	14 (± 0.1)	31 (± 0.1)	93	72	G 1/8	$\varnothing 40$ (f8)	$\varnothing 60$ (d11)	$\varnothing 18$ (h7)
PNCE 100 - 40x5	42	20	18 (± 0.1)	34 (± 0.1)	110	89	G 3/8	$\varnothing 50$ (f8)	$\varnothing 70$ (d11)	$\varnothing 25$ (h7)
PNCE 100 - 40x10	42	20	18 (± 0.1)	34 (± 0.1)	110	89	G 3/8	$\varnothing 50$ (f8)	$\varnothing 70$ (d11)	$\varnothing 25$ (h7)
PNCE 100 - 40x20	42	20	18 (± 0.1)	34 (± 0.1)	110	89	G 3/8	$\varnothing 50$ (f8)	$\varnothing 70$ (d11)	$\varnothing 25$ (h7)
PNCE 100 - 40x40	42	20	18 (± 0.1)	34 (± 0.1)	110	89	G 3/8	$\varnothing 50$ (f8)	$\varnothing 70$ (d11)	$\varnothing 25$ (h7)

Designation	D4	M1	M2	M3	H	A1	A2	A3	ZK1	ZK2
PNCE 32 - 12x5	$\varnothing 30$ (g7)	$\varnothing M10 \times 1.25$	$\varnothing M10 \times 1.25$	M6	$\varnothing 8$	22	5	5	10	17
PNCE 32 - 12x10	$\varnothing 30$ (g7)	$\varnothing M10 \times 1.25$	$\varnothing M10 \times 1.25$	M6	$\varnothing 8$	22	5	5	10	17
PNCE 40 - 16x5	$\varnothing 35$ (g7)	$\varnothing M12 \times 1.25$	$\varnothing M12 \times 1.25$	M6	$\varnothing 8$	24	6	6	13	19
PNCE 40 - 16x10	$\varnothing 35$ (g7)	$\varnothing M12 \times 1.25$	$\varnothing M12 \times 1.25$	M6	$\varnothing 8$	24	6	6	13	19
PNCE 40 - 16x16	$\varnothing 35$ (g7)	$\varnothing M12 \times 1.25$	$\varnothing M12 \times 1.25$	M6	$\varnothing 8$	24	6	6	13	19
PNCE 50 - 20x5	$\varnothing 40$ (g7)	$\varnothing M16 \times 1.5$	$\varnothing M16 \times 1.5$	M8	$\varnothing 8$	32	8	8	17	24

Dimensions

Designation	D4	M1	M2	M3	H	A1	A2	A3	ZK1	ZK2
PNCE 50 - 20x10	Ø 40 (g7)	Ø M16 × 1.5	Ø M16 × 1.5	M8	Ø 8	32	8	8	17	24
PNCE 50 - 20x20	Ø 40 (g7)	Ø M16 × 1.5	Ø M16 × 1.5	M8	Ø 8	32	8	8	17	24
PNCE 50 - 20x50	Ø 40 (g7)	Ø M16 × 1.5	Ø M16 × 1.5	M8	Ø 8	32	8	8	17	24
PNCE 63 - 25x5	Ø 45 (g7)	Ø M16 × 1.5	Ø M16 × 1.5	M8	Ø 8	32	8	8	17	24
PNCE 63 - 25x10	Ø 45 (g7)	Ø M16 × 1.5	Ø M16 × 1.5	M8	Ø 8	32	8	8	17	24
PNCE 63 - 25x25	Ø 45 (g7)	Ø M16 × 1.5	Ø M16 × 1.5	M8	Ø 8	32	8	8	17	24
PNCE 80 - 32x5	Ø 60 (g7)	Ø M20 × 1.5	Ø M12	M10	Ø 8	40	8	10	22	30
PNCE 80 - 32x10	Ø 60 (g7)	Ø M20 × 1.5	Ø M12	M10	Ø 8	40	8	10	22	30
PNCE 80 - 32x20	Ø 60 (g7)	Ø M20 × 1.5	Ø M12	M10	Ø 8	40	8	10	22	30
PNCE 80 - 32x32	Ø 60 (g7)	Ø M20 × 1.5	Ø M12	M10	Ø 8	40	8	10	22	30
PNCE 100 - 40x5	Ø 60 (g7)	Ø M20 × 1.5	Ø M12	M10	Ø 12	40	8	10	22	30
PNCE 100 - 40x10	Ø 70 (g7)	Ø M20 × 1.5	Ø M12	M10	Ø 12	40	6	10	22	30
PNCE 100 - 40x20	Ø 70 (g7)	Ø M20 × 1.5	Ø M12	M10	Ø 12	40	6	10	22	30
PNCE 100 - 40x40	Ø 70 (g7)	Ø M20 × 1.5	Ø M12	M10	Ø 12	40	6	10	22	30

Designation	ZK3	V1	V2
PNCE 32 - 12x5	16	16	4.5
PNCE 32 - 12x10	16	16	4.5
PNCE 40 - 16x5	17	16	4.5
PNCE 40 - 16x10	17	16	4.5
PNCE 40 - 16x16	17	16	4.5
PNCE 50 - 20x5	22	18	4.5
PNCE 50 - 20x10	22	18	4.5
PNCE 50 - 20x20	22	18	4.5
PNCE 50 - 20x50	22	18	4.5
PNCE 63 - 25x5	27	18	4.5
PNCE 63 - 25x10	27	18	4.5
PNCE 63 - 25x25	27	18	4.5
PNCE 80 - 32x5	32	17	/
PNCE 80 - 32x10	32	17	/
PNCE 80 - 32x20	32	17	/
PNCE 80 - 32x32	32	17	/
PNCE 100 - 40x5	40	17	/
PNCE 100 - 40x10	40	17	/

Dimensions

Designation	ZK3	V1	V2
PNCE 100 - 40x20	40	17	/
PNCE 100 - 40x40	40	17	/