Bottom Mounting Rail SBI-B



Cut to length acc. to request.
Rails can be joint together for extra long lengths.
Contact Rollco for more information.

Note: If the maximum length exceeds this size please contact Rollco.

All blocks and rails are also available in Raydent treated material:
• Corrosion resistant
• Patented black surface
• Delivered with steel balls of standard bearing steel.
Stainless steel balls are available on special request and for a few sizes only. Contact Rollco for more information.

Dimensions in mm.


For more information about recommended screw size, strength and tightening torque, see Linear Rail SBI Technical Information.

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

General Data

Designation	Weight Rail (g/m)
SBI15-B	1390
SBI20-B	2370
SBI25-B	3260
SBI30-B	4630
SBI35-B	6450
SBI45-B	10490

Dimensions

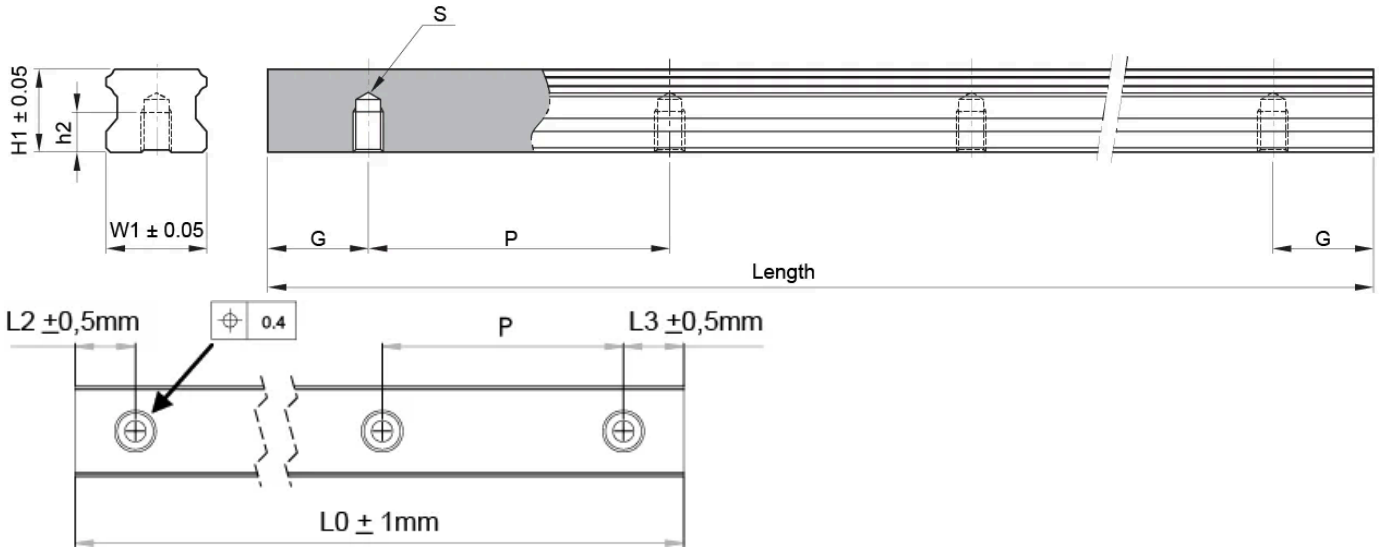

Designation	W1	H1	h2	Hole Pitch (P)	G	S	Length
SBI15-B	15	13	8	60	20	M5	3000
SBI20-B	20	16.5	9	60	20	M6	4000
SBI25-B	23	20	9	60	20	M6	4000
SBI30-B	28	23	12	80	20	M8	4000
SBI35-B	34	26	12	80	20	M8	4000
SBI45-B	45	32	18	105	22.5	M12	4000

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.