MF Container Self Lubricant

Self-lubricant container MF is an option suitable for situations where re-lubrication is difficult or impossible to achieve.


Option MF consist of a small container filled with grease impregnated felt. The felt provides a continuous oil film directly and only on the four raceways of the rail profile. This results in a very precise and long-lived lubrication in exactly the most effective spots.


If option MF is selected, the block will be delivered without grease nipple.

Dimensions in mm.




Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

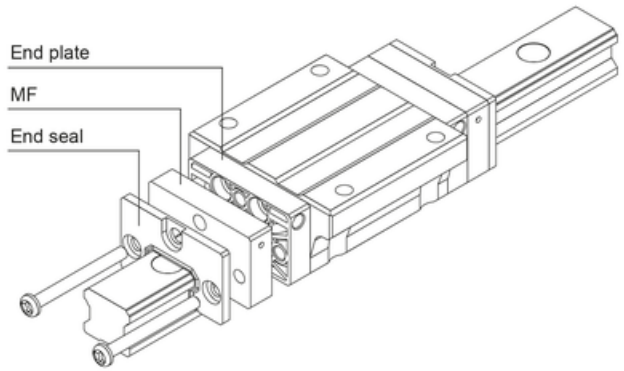



* MF contact surfaces are tolerance match to the guiderail to ensure perfect sealing

Dimensions

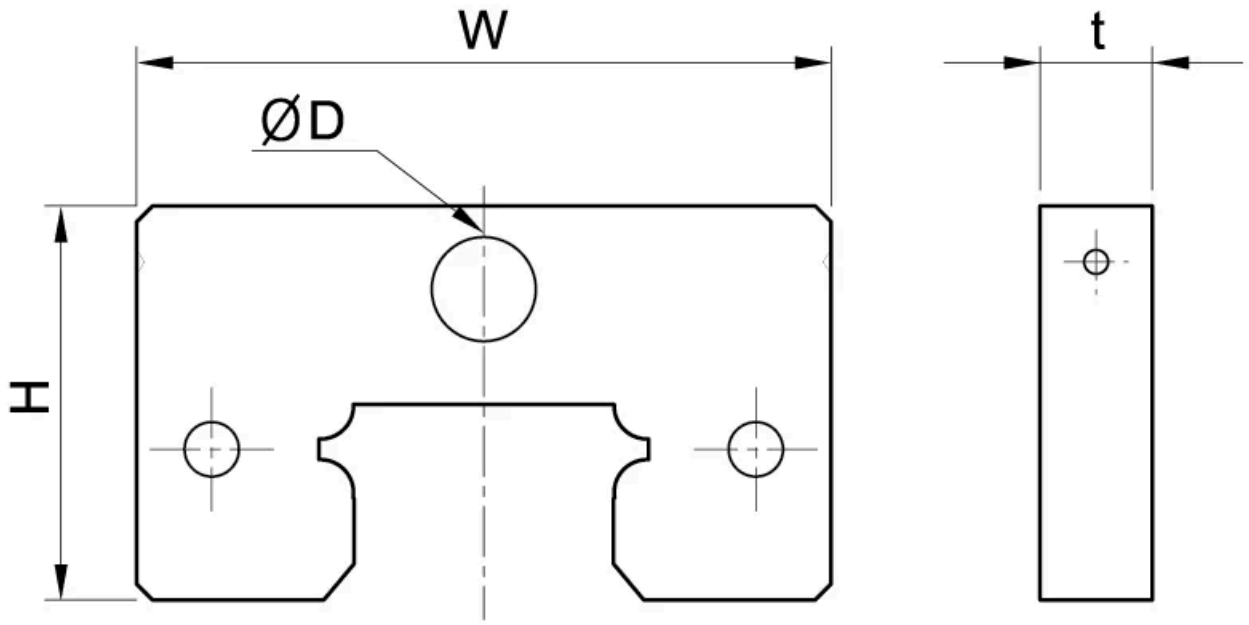

Designation	Block Type	W	t	H	D
SBI15-MFA	FL, FLL, HL, HLL, SL, SLL, FV, SV	33.4	7	20.2	4
SBI20-MFA	FL, FLL, SL, SLL	43.4	7	24.6	6.5
SBI20-MFB	CL, CLL, FV, SV	43.4	7	22.6	6.5
SBI25-MFA	FL, FLL, HL, HLL, SL, SLL	47	7	29.7	6.5
SBI25-MFB	CL, CLL, FV, SV	47	7	26.7	6.5
SBI30-MFA	FL, FLL, HL, HLL, SL, SLL	59	8	34.2	6.5
SBI35-MFA	FL, FLL, HL, HLL, SL, SLL	69	8	39.7	6.5
SBI45-MFA	FL, FLL, HL, HLL, SL, SLL	85	8	49.7	10.5
SBI55-MFA	FL, FLL, HL, HLL, SL, SLL	98	9	56	10.5
SBI65-MFA	FL, FLL, SL, SLL	123	9	69	10.5

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.