Bottom Mounting Rail RMG-B

Rails with holes threaded from the bottom and induction hardened raceways.

Very high load capacity, stiffness and precision.

Dimensions in mm. (According to the DIN 645/I standards.)




Max. Operating Speed (m/s): 3
Max. Acceleration (m/s²): 50
Temperature range (°C): -10 °C to +80
Length (mm): Up to 4000 mm
Material: Hardened steel


Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

General Data

Designation	Weight (kg/m)
RMG55-B	15.2
RMG25-B	3.4
RMG65-B	22.5
RMG35-B	6.5
RMG45-B	10.7

Dimensions



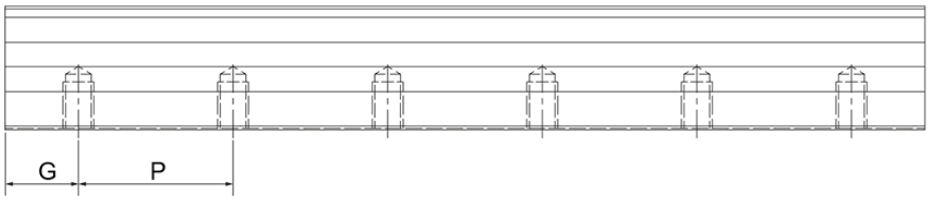

Designation	H1	W1	d x g1	Hole Pitch (P)
RMG55-B	47.8	53	M14 x 22	60
RMG25-B	24.35	23	M6 x 12	30
RMG65-B	55	63	M16 x 25	75
RMG35-B	32	34	M8 x 15	40
RMG45-B	39.85	45	M12 x 19	52.5

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.