TR---.0360

• Lubricated for lifetime

Use profile UP---.0700
Fixing square element BQ---.1000
Rectangular fixing element BR---.1100

Note! System Load Capacity refers to capacity of both rail and bearing. Dynamic Load Capacity refers to bearing.

Dimensions in mm.




Roller Type: Standard
Sizes Available: 50; 60; 70; 80; 90; 110; 120; 150

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.



General Data


FA = System Load Capacity Axial
FR = System Load Capacity Radial
Ca = Dynamic Load Capacity Axial
C = Dynamic Load Capacity Radial

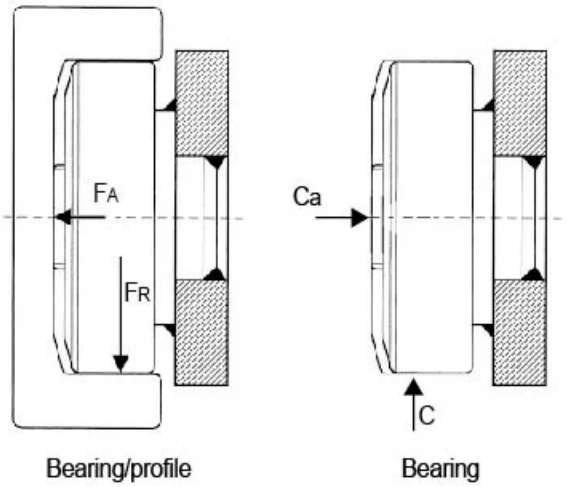

Designation	System Load Capacity Radial (N)	System Load Capacity Axial (N)	Dynamic Load Capacity Radial (N)	Profile
TR050.0360	5300	2000	24500	UP-- -.0700
TR060.0360	8870	2950	31000	UP-- -.0700
TR070.0360	11400	3150	45500	UP-- -.0700
TR080.0360	12870	5000	48000	UP-- -.0700
TR090.0360	20370	5100	68000	UP-- -.0700
TR110.0360	24060	8900	81000	UP-- -.0700
TR120.0360	33440	9800	110000	UP-- -.0700
TR150.0360	51940	17400	151000	UP-- -.0700

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

Dimensions

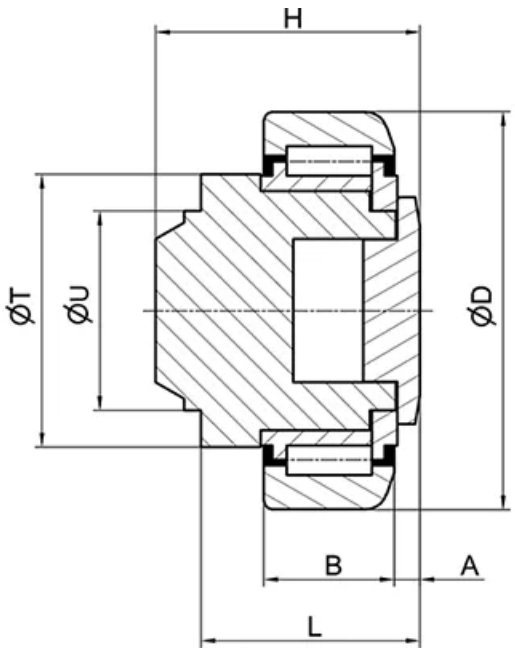

Designation	A	B	D	H	L	T	U
TR050.0360	6	17	52.5	34	28	40	30
TR060.0360	5.5	20	62.5	43	33	42	30
TR070.0360	6.5	23	70.1	48	40	48	35
TR080.0360	7	23	77.7	50.5	39.5	54	40
TR090.0360	7	30	88.4	61	48	59	45
TR110.0360	8	31	107.7	69	55	71	60
TR120.0360	8	37	123	75.8	59.5	80	60
TR150.0360	8	45	149	82	62	103	60

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.