

## TR---.0390

- Combined – fixed with oilamide sliding block
- Completely made of 1.4301 stainless steel with bearing bush out of synthetic material

Use profile UP---.0780

Fixing square element BQ---.4000

Rectangular fixing element BR---.4100

For the adjustment of the axial clearance (A) distance rings will be used.

Order example: TR080.0390

Roller, stainless, Ø 77,7 mm

Note! System Load Capacity refers to capacity of both rail and bearing. Dynamic Load Capacity refers to bearing.

Dimensions in mm.

**Roller Type:** Stainless

**Sizes Available:** 50; 70; 80






## General Data

FA = System Load Capacity Axial  
 FR = System Load Capacity Radial  
 Ca = Dynamic Load Capacity Axial  
 C = Dynamic Load Capacity Radial



Designation	System Load Capacity Radial (N)	System Load Capacity Axial (N)	Dynamic Load Capacity Radial (N)	Profile
TR050.0390	3500	2000	3700	UP-- -.0780
TR070.0390	6000	3000	7000	UP-- -.0780
TR080.0390	7200	4000	7500	UP-- -.0780

## Dimensions

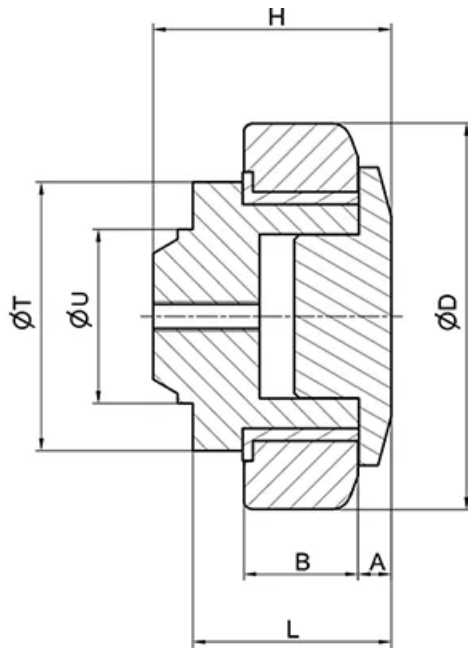

Designation	A	B	D	H	L	T	U
TR050.0390	5	17	52.5	33	28	42	30
TR070.0390	6.5	23	70.1	48	40	54	35
TR080.0390	7	23	77.7	50.5	39.5	54	40