

Swivel Castors, Bolt Hole

Housing made of Polyamide, precision ball bearing in swivel head, bolt hole.

Wheel centre made of Polyamide.

Tread made of Polyurethane, precision ball bearing.

Standard: EN 12530

Hardness of tread: Shore A 92

Material: Polyamide

System: 40 - Slot 8; 30 - Slot 6; 20 - Slot 5

Temperature range (°C): -10° to +40°

Type: Castors



PZ1542




PZ1541





PZ1545


General Data

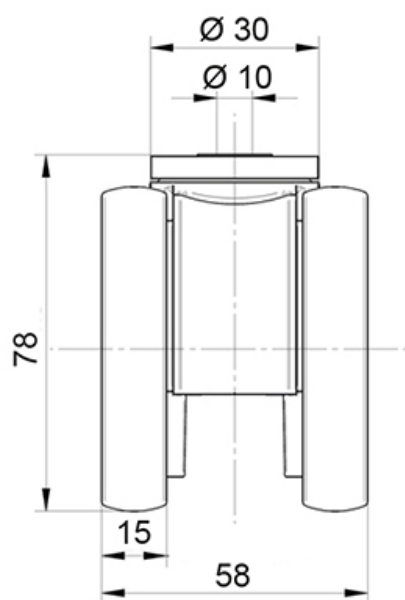


PZ1542

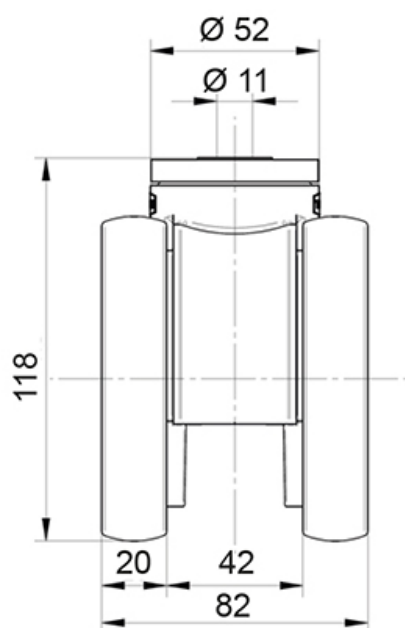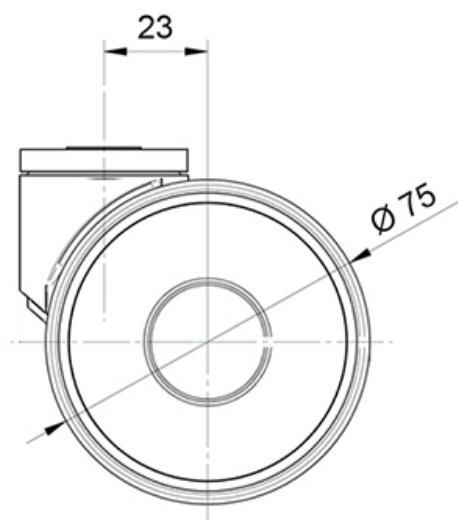

PZ1541

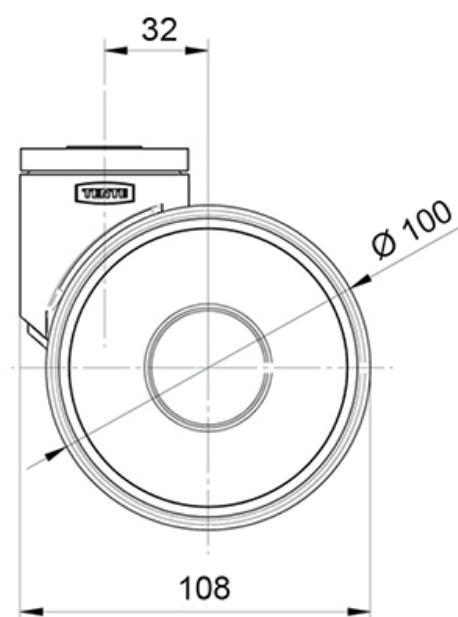

General Data

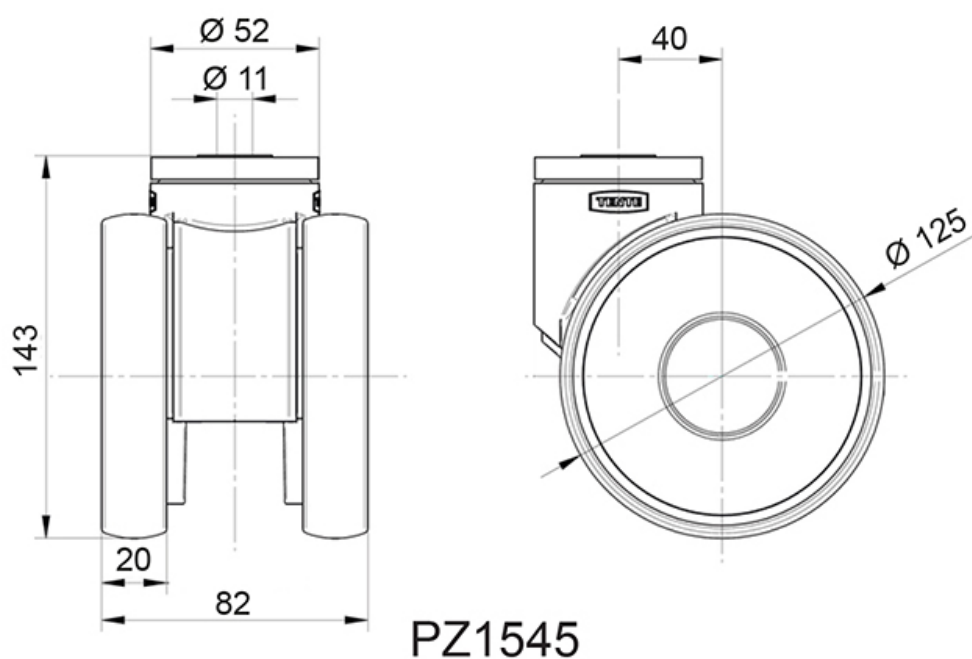

Designation	Description	Wheel Diameter (mm)	Colour	Weight (g)	Swivel Interference (mm)
PZ1542	Swivel castor with bolt hole	75	RAL9002	216	121
PZ1541	Swivel castor with bolt hole	100	RAL9002	682	180
PZ1545	Swivel castor with bolt hole	125	RAL9002	774	218

Designation	Load capacity (kg)	Static Load Capacity (kg)
PZ1542	90	180
PZ1541	100	200
PZ1545	110	220