

RSKR

Single Nut, Cylindrical with Thread
Match with Screw shaft: SR.

Tolerance D: h10

Standard nuts are without any seals or scrapers. Other types on request.


All other dimensions in mm.



Load

| Designation | Compatible with | Dynamic Load Ratings Ca (N) | Static Load Ratings C0a (N) |
|------------------|-------------------------------|-----------------------------|-----------------------------|
| RSKR082.5 | FKN06 | 2109 | 2345 |
| RSKR1204 | BKN08 / FKN08 / BFN08 | 6327 | 6798 |
| RSKR1605 | BKN12 / FKN12 / BFN12 / FFN12 | 10291 | 11223 |

Dimensions

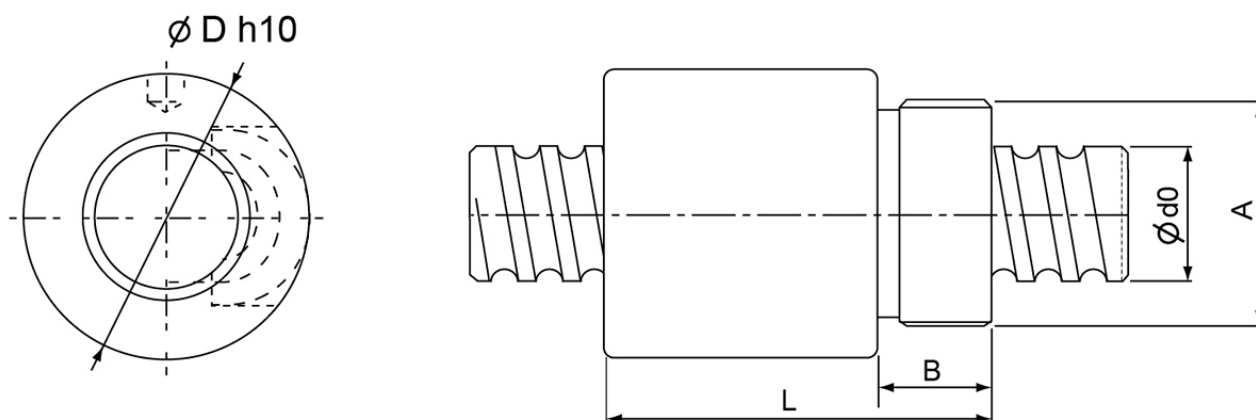

| Designation | d0 x Lead | A | B | L | D |
|------------------|-----------|-----------|-----|----|------|
| RSKR082.5 | 8 x 2.5 | M15 x 1 | 7.5 | 26 | 17.5 |
| RSKR1204 | 12 x 4 | M20 x 1 | 10 | 34 | 25.5 |
| RSKR1605 | 16 x 5 | M26 x 1.5 | 12 | 42 | 32.5 |

Ball dia./Turns

| Designation | Ball diameter | Turns x circuits |
|-------------|---------------|------------------|
| RSKR082.5 | 1.2 | 1 x 2.5 |
| RSKR1204 | 2.381 | 1 x 3.5 |
| RSKR1605 | 3.175 | 1 x 3.5 |