

W

Dimensions in mm.

Other types available on request.

Material: Quenched and tempered steel Cf53 / 1.1213 / C53G

Surface hardness: 59 HRC min. Hardening depth according to DIN ISO 18203.


Standard Tolerance: ISO h6



General Data

Designation	Weight (kg/m)
W5	0.15
W6	0.22
W8	0.39
W10	0.62
W12	0.89
W14	1.21
W16	1.58
W20	2.47
W25	3.85
W30	5.55
W40	9.86
W50	15.41
W60	22.2
W80	39.46

Dimensions

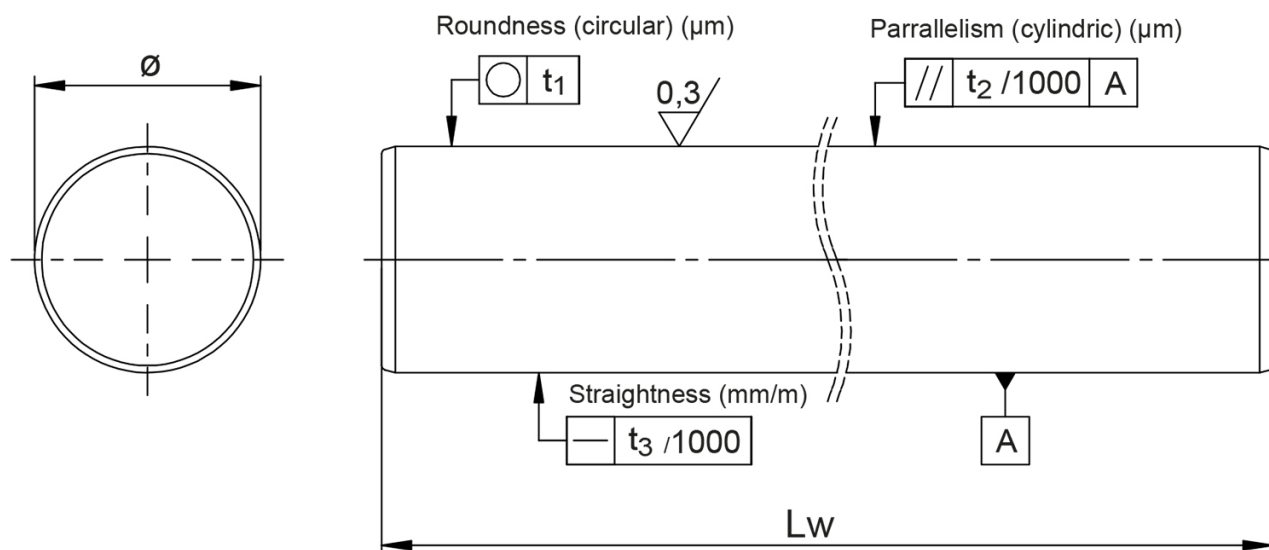

Designation	L_w (mm)	Diameter	Hardening Depth	Roundness t_1	Parallelism t_2	Straightness t_3
W5	4000	5	.4	4	5	.3
W6	6000	6	.4	4	5	.3
W8	6000	8	.4	4	6	.3
W10	6000	10	.4	4	6	.3
W12	6000	12	.6	5	8	.3
W14	6000	14	.6	5	8	.3
W16	6000	16	.6	5	8	.2
W20	6000	20	.9	6	9	.2
W25	6000	25	.9	6	9	.2
W30	6000	30	.9	6	9	.2
W40	6000	40	1.5	7	11	.2
W50	6000	50	1.5	7	11	.2
W60	6000	60	2.2	8	13	.2
W80	6000	80	2.2	8	13	.2