

FTSN

Aluminium with mounting holes.

Standard section length $L = 3700$ mm. Lengths other than standard ($L_{\max} = 3700$ mm) are also available on request.

Support rails can be supplied upon request, with or without mounting holes. No anodizing in holes.


Dimensions in mm.

Note: The shaft is not included, please order separately.

Material: Aluminium



Dimensions

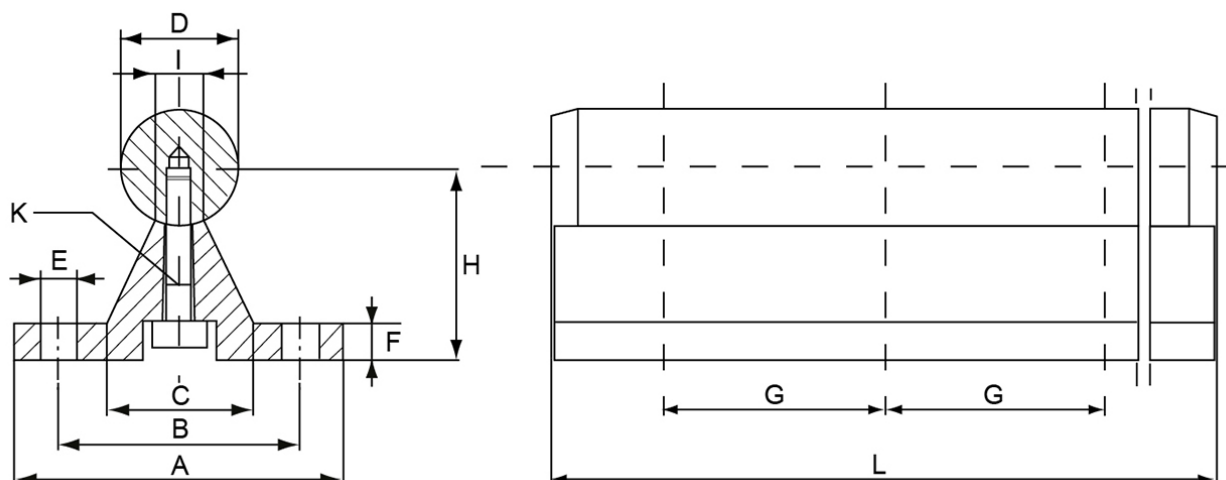

| Designation | Remark | G | A | B | H | D | K | F | C |
|----------------|-------------------------------------|-----|----|----|----|----|--------|---|----|
| FTSN12G | Standard section length L = 3700 mm | 75 | 40 | 29 | 22 | 12 | M4x20 | 5 | 15 |
| FTSN16G | Standard section length L = 3700 mm | 100 | 45 | 33 | 26 | 16 | M5x20 | 5 | 19 |
| FTSN20G | Standard section length L = 3700 mm | 100 | 52 | 37 | 32 | 20 | M6x25 | 6 | 23 |
| FTSN25G | Standard section length L = 3700 mm | 120 | 57 | 42 | 36 | 25 | M8x30 | 6 | 26 |
| FTSN30G | Standard section length L = 3700 mm | 150 | 69 | 51 | 42 | 30 | M10x35 | 7 | 29 |
| FTSN40G | Standard section length L = 3700 mm | 200 | 73 | 55 | 50 | 40 | M10x40 | 8 | 36 |

| Designation | E | I |
|----------------|-----|------|
| FTSN12G | 4.5 | 5.4 |
| FTSN16G | 5.5 | 7 |
| FTSN20G | 6.6 | 8.1 |
| FTSN25G | 6.6 | 10.3 |
| FTSN30G | 9 | 11 |
| FTSN40G | 9 | 15 |