


Self-aligning joint FK

Dimensions in mm.


Material: Galvanized steel

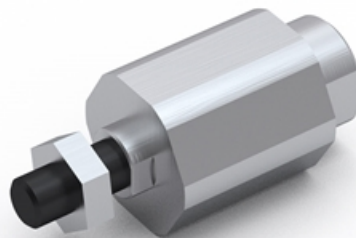



General Data

| Designation | Description | Compatible with | Material | Fmax (N) | Mass (kg) |
|---------------------|-------------|-----------------|------------------|----------|-----------|
| FK 25 - 5473 | FK 25 | MCE 25 | Galvanized steel | F MCE | 0.03 |
| FK 32 - 5474 | FK 32 | MCE 32 | Galvanized steel | F MCE | 0.06 |
| FK 45 - 5466 | FK 45 | MCE 45 | Galvanized steel | F MCE | 0.22 |

Dimensions



Simple support

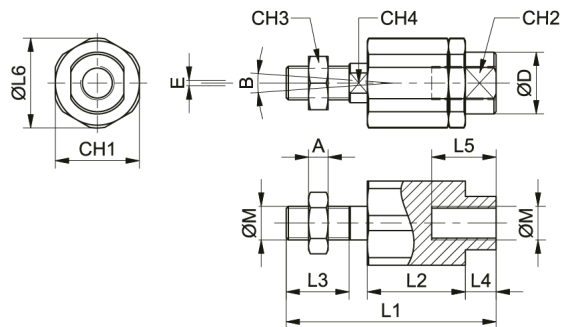

| Designation | M | L1 | L2 | L3 | L4 | L5 | L6 | A | D |
|---------------------|------------|------|------|----|----|------|------|---|------|
| FK 25 - 5473 | M6 | 35 | 17.5 | 11 | 4 | 12.5 | 14.5 | 4 | 8.5 |
| FK 32 - 5474 | M8 | 57 | 26 | 21 | 5 | 16 | 19 | 5 | 12.5 |
| FK 45 - 5466 | M10 × 1.25 | 71.5 | 35 | 20 | 9 | 22 | 32 | 6 | 22 |

| Designation | E | CH1 | CH2 | CH3 | CH4 | B |
|---------------------|---|-----|-----|-----|-----|---|
| FK 25 - 5473 | 1 | 13 | 7 | 10 | 5 | 6 |
| FK 32 - 5474 | 2 | 17 | 11 | 13 | 7 | 8 |
| FK 45 - 5466 | 2 | 30 | 19 | 17 | 12 | 8 |