

Table of contents

- **5030 - 100% Extension**
- **5040 - 100% Extension**
- **5040 - 140% Extension**

5030 - 100% Extension

* Outer beam: 2 holes in both ends.


All dimensions in mm.

System Load Capacity value refers to a pair of rails.

Extension: 100%




General Data

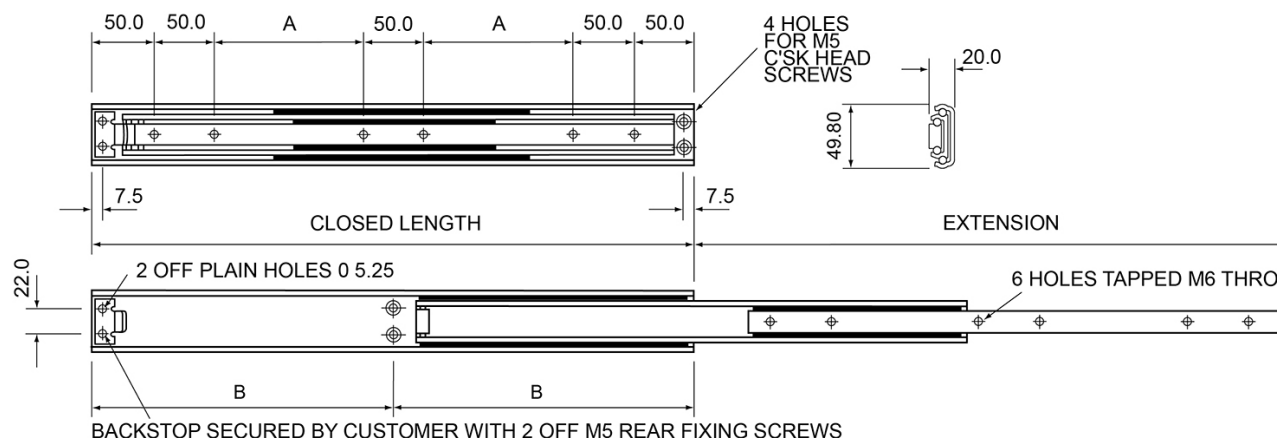

Designation	Closed Length	Extension Length	System Load Capacity (N)	Number of Fixing Holes
5030-300	300	300	1900	4
5030-350	350	350	1830	6
5030-400	400	400	1750	6
5030-450	450	450	1650	6
5030-500	500	500	1550	6
5030-550	550	550	1450	6
5030-600	600	600	1370	6
5030-650	650	650	1250	6
5030-700	700	700	1180	6
5030-750	750	750	1050	6
5030-800	800	800	950	6
5030-850	850	850	830	6
5030-900	900	900	720	6
5030-950	950	950	600	6
5030-1000	1000	1000	500	6

Dimensions

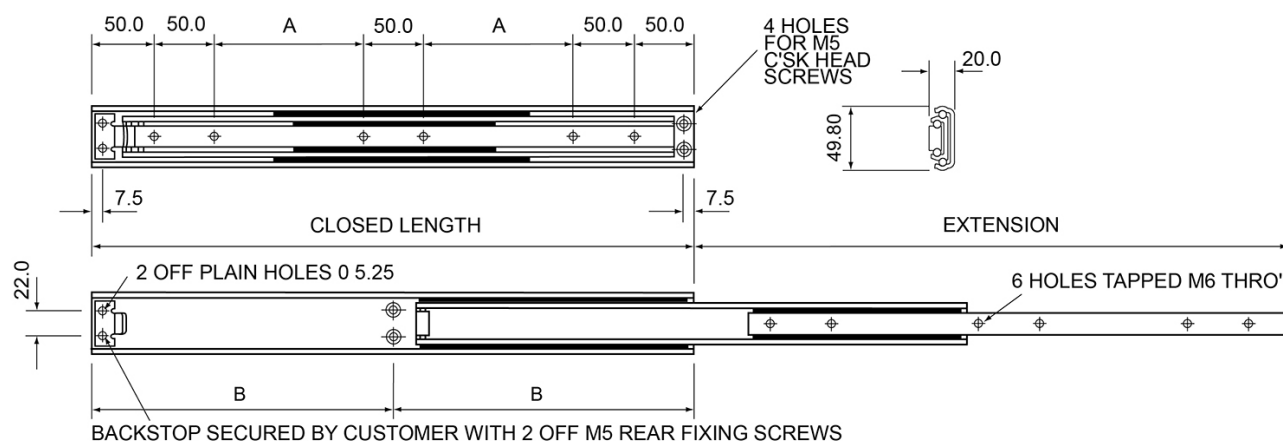

Designation	A	B
5030-300	*	150
5030-350	50	175
5030-400	75	200
5030-450	100	225
5030-500	125	250
5030-550	150	275
5030-600	175	300
5030-650	200	325
5030-700	225	350
5030-750	250	375
5030-800	275	400
5030-850	300	425
5030-900	325	450
5030-950	350	475
5030-1000	375	500

5040 - 100% Extension


All dimensions in mm.

System Load Capacity value refers to a pair of rails.

Extension: 100%




General Data

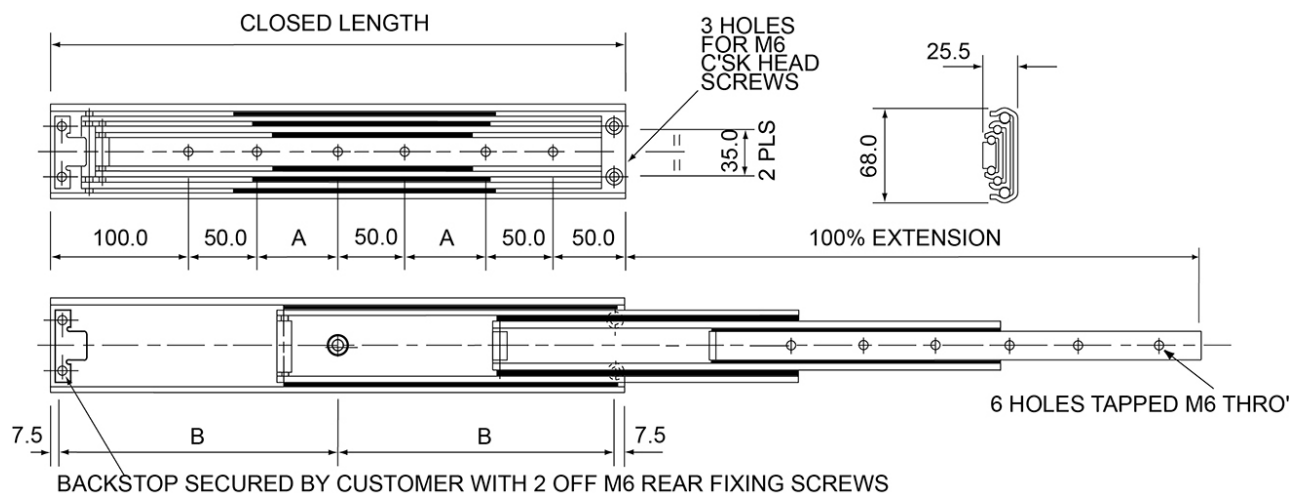

Designation	Closed Length	Extension Length	System Load Capacity (N)	Number of Fixing Holes
5040-300 100%	300	300	2600	4
5040-350 100%	350	350	2570	6
5040-400 100%	400	400	2450	6
5040-450 100%	450	450	2380	6
5040-500 100%	500	500	2300	6
5040-550 100%	550	550	2200	6
5040-600 100%	600	600	2100	6
5040-650 100%	650	650	2000	6
5040-700 100%	700	700	1950	6
5040-750 100%	750	750	1820	6
5040-800 100%	800	800	1780	6
5040-850 100%	850	850	1680	6
5040-900 100%	900	900	1600	6
5040-950 100%	950	950	1500	6
5040-1000 100%	1000	1000	1400	6

Dimensions

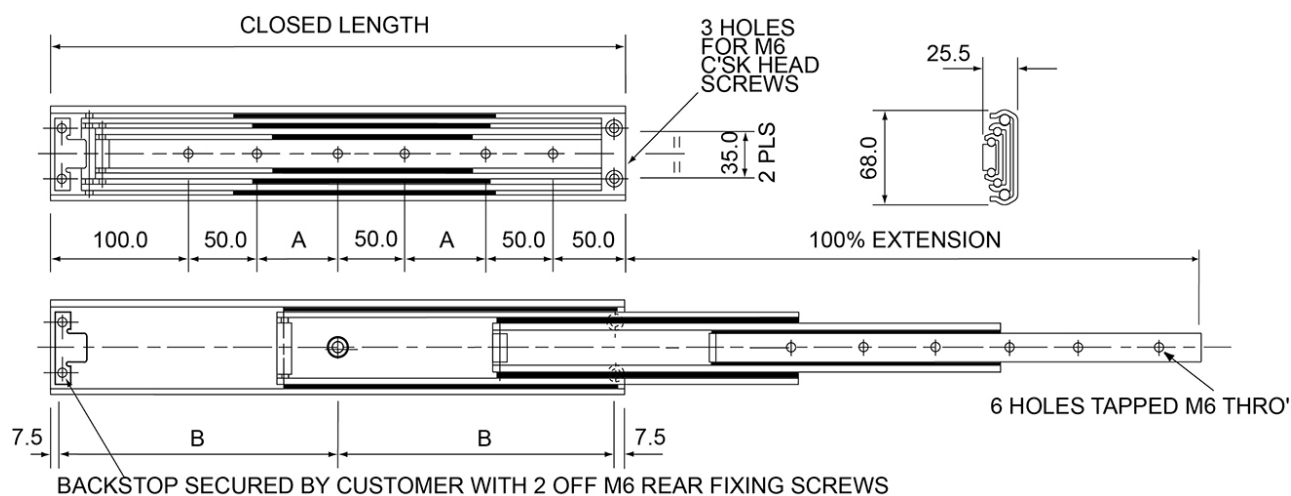

Designation	A	B
5040-300 100%	50	142.5
5040-350 100%	25	167.5
5040-400 100%	50	192.5
5040-450 100%	75	217.5
5040-500 100%	100	242.5
5040-550 100%	125	267.5
5040-600 100%	150	292.5
5040-650 100%	175	317.5
5040-700 100%	200	342.5
5040-750 100%	225	367.5
5040-800 100%	250	392.5
5040-850 100%	275	417.5
5040-900 100%	300	442.5
5040-950 100%	325	467.5
5040-1000 100%	350	492.5

5040 - 140% Extension


All dimensions in mm.

System Load Capacity value refers to a pair of rails.

Extension: 140%




General Data

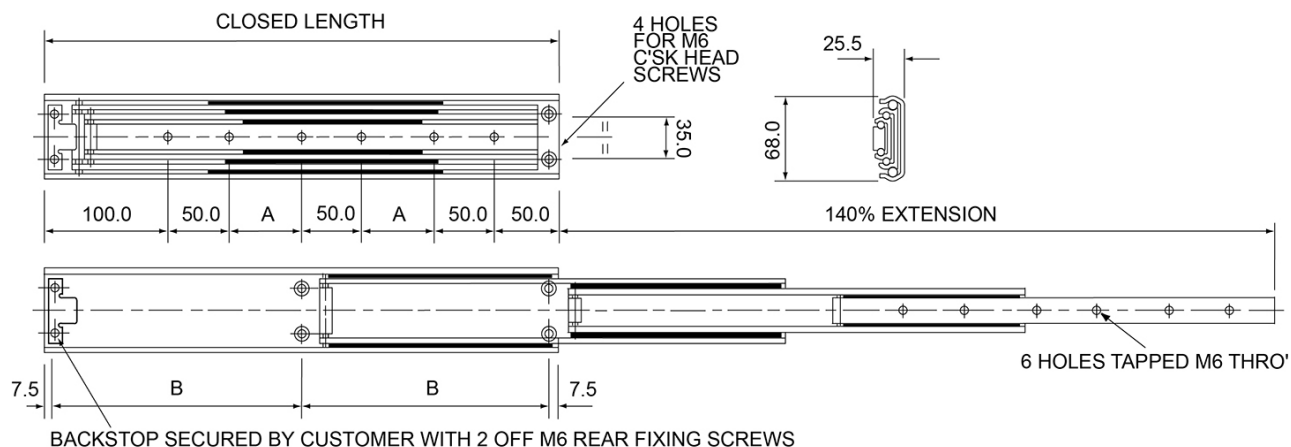

Designation	Closed Length	Extension Length	System Load Capacity (N)	Number of Fixing Holes
5040-300 140%	300	420	1700	4
5040-350 140%	350	490	1700	6
5040-400 140%	400	560	1680	6
5040-450 140%	450	630	1630	6
5040-500 140%	500	700	1600	6
5040-550 140%	550	770	1580	6
5040-600 140%	600	840	1560	6
5040-650 140%	650	910	1400	6
5040-700 140%	700	980	1300	6
5040-750 140%	750	1050	1200	6
5040-800 140%	800	1120	1180	6
5040-850 140%	850	1190	1100	6
5040-900 140%	900	1260	1000	6
5040-950 140%	950	1330	900	6
5040-1000 140%	1000	1400	800	6

Dimensions

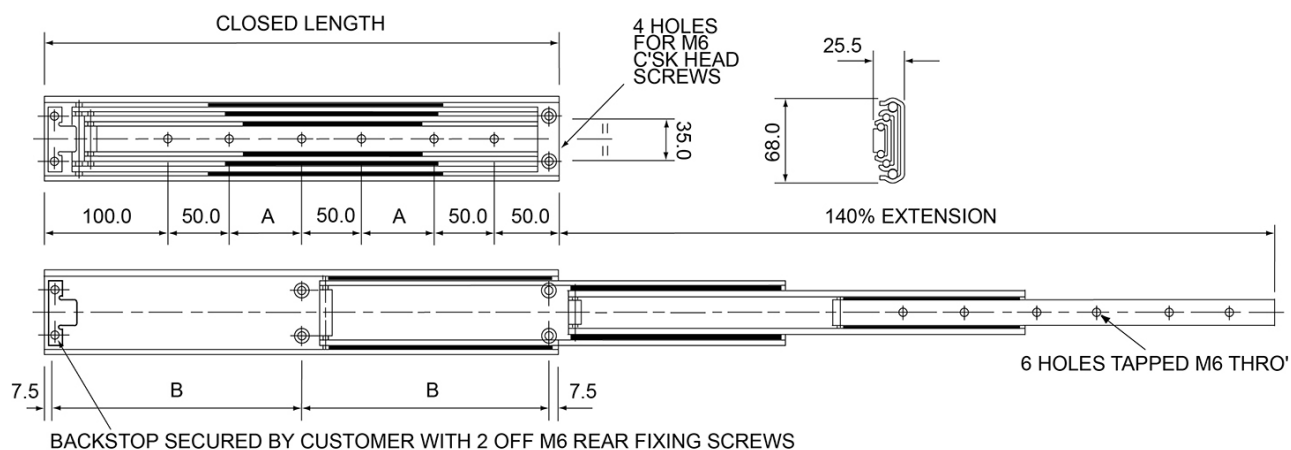

Designation	A	B
5040-300 140%	50	142.5
5040-350 140%	25	167.5
5040-400 140%	50	192.5
5040-450 140%	75	217.5
5040-500 140%	100	242.5
5040-550 140%	125	267.5
5040-600 140%	150	292.5
5040-650 140%	175	317.5
5040-700 140%	200	342.5
5040-750 140%	225	367.5
5040-800 140%	250	392.5
5040-850 140%	275	417.5
5040-900 140%	300	442.5
5040-950 140%	325	467.5
5040-1000 140%	350	492.5