5040 - 100% Extension

The 5040 is a 4 beam version of the 5030. The 5040 100% extension can carry up to 260 kg per pair.
Standard lengths 300 to 1000 mm in 50 mm increments.

All dimensions in mm.

System Load Capacity value refers to a pair of rails at full extension.

Material: Cold-drawn steel profile, zinc plated
Extension: 100%

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

General Data

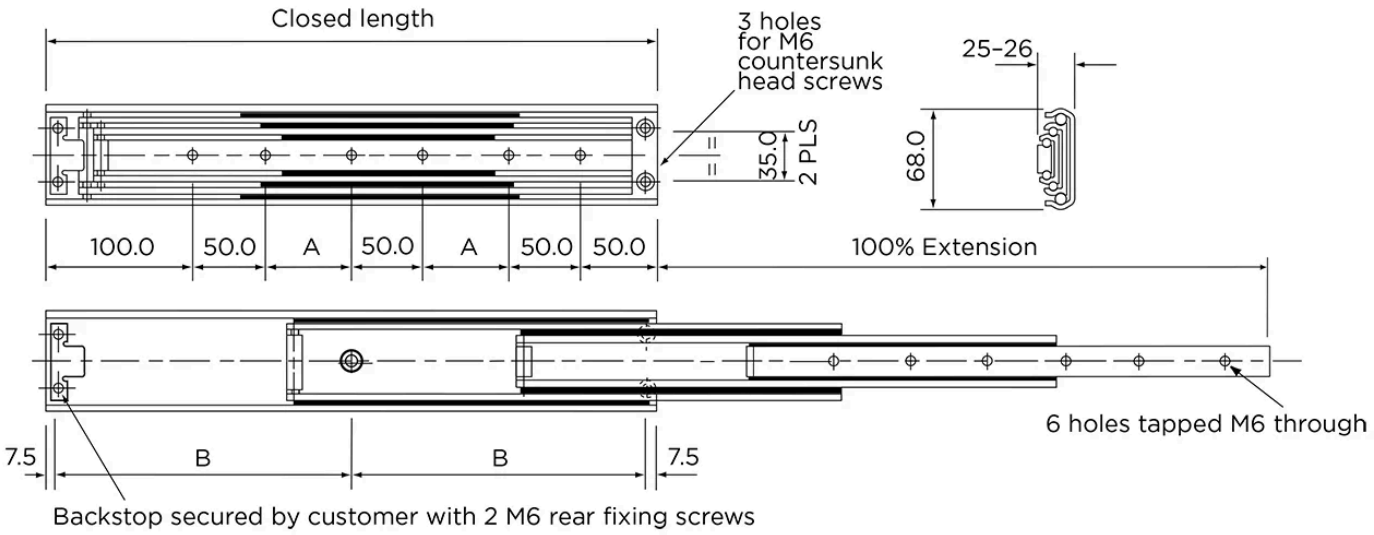

Designation	Closed Length	Extension Length	System Load Capacity (N)	Number of Fixing Holes	Weight/pc (kg)
5040-300-100	300	300	2600	4	2.17
5040-350-100	350	350	2570	6	2.6
5040-400-100	400	400	2450	6	3.02
5040-450-100	450	450	2380	6	3.41
5040-500-100	500	500	2300	6	3.85
5040-550-100	550	550	2200	6	4.24
5040-600-100	600	600	2100	6	4.68
5040-650-100	650	650	2000	6	5.02
5040-700-100	700	700	1950	6	5.42
5040-750-100	750	750	1820	6	5.78
5040-800-100	800	800	1780	6	6.22
5040-850-100	850	850	1680	6	6.64
5040-900-100	900	900	1600	6	7.04
5040-950-100	950	950	1500	6	7.44
5040-1000-100	1000	1000	1400	6	7.9

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

Dimensions

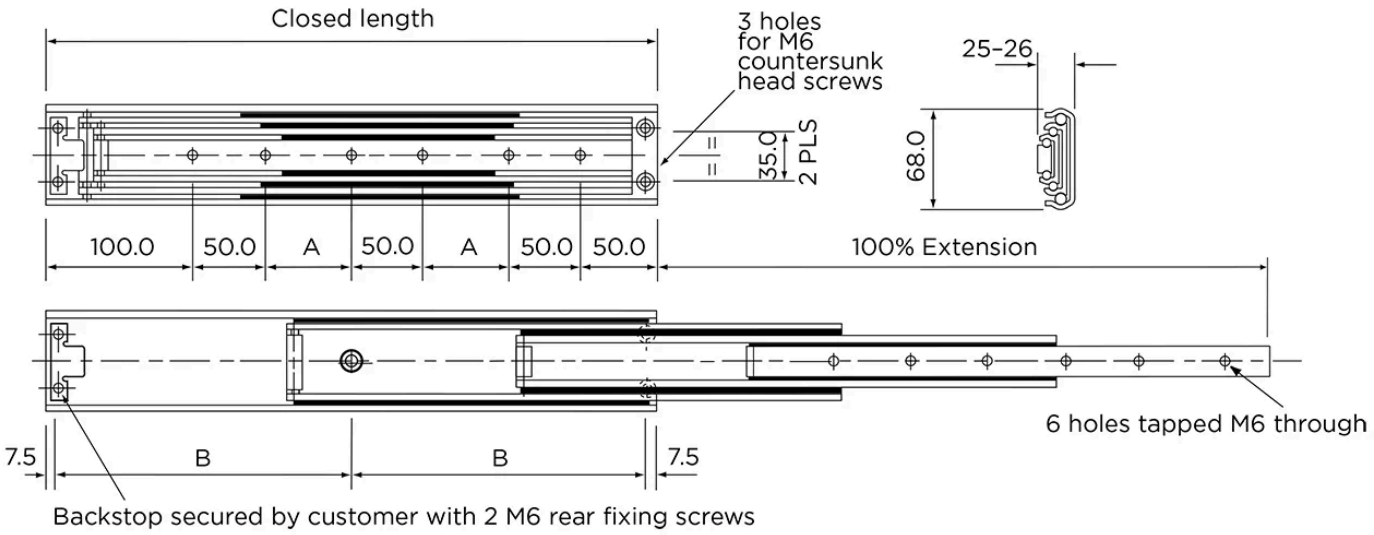

Designation	A	B
5040-300-100	-	142.5
5040-350-100	25	167.5
5040-400-100	50	192.5
5040-450-100	75	217.5
5040-500-100	100	242.5
5040-550-100	125	267.5
5040-600-100	150	292.5
5040-650-100	175	317.5
5040-700-100	200	342.5
5040-750-100	225	367.5
5040-800-100	250	392.5
5040-850-100	275	417.5
5040-900-100	300	442.5
5040-950-100	325	467.5
5040-1000-100	350	492.5

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.