# 210 Non Lock - 100% Extension

A precision ball bearing slide with smooth movement combined with good load carrying capacity. All aluminium slide.
A row of ball bearings in each track, concealed in nylon cages, ensures smooth and easy operation. Carrying loads up to 90 kg per pair.
Standard lengths 300 to 600 mm in 50 mm increments.

All dimensions in mm.

System Load Capacity value refers to a pair of rails at full extension.

Note 1: 15 mm dia. holes in centre beam allow easy access to fixing holes. M5 countersunk head screws to BS4183 are recommended for fixing.

Note 2: Elongated holes should be provided in either the framework or chassis to give adjustment if it is necessary for the panel to fit tight against the framework.

**Material:** Aluminium with steel ball bearings, standard anodizing finish silver.
**Extension:** 100%


Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

# General Data

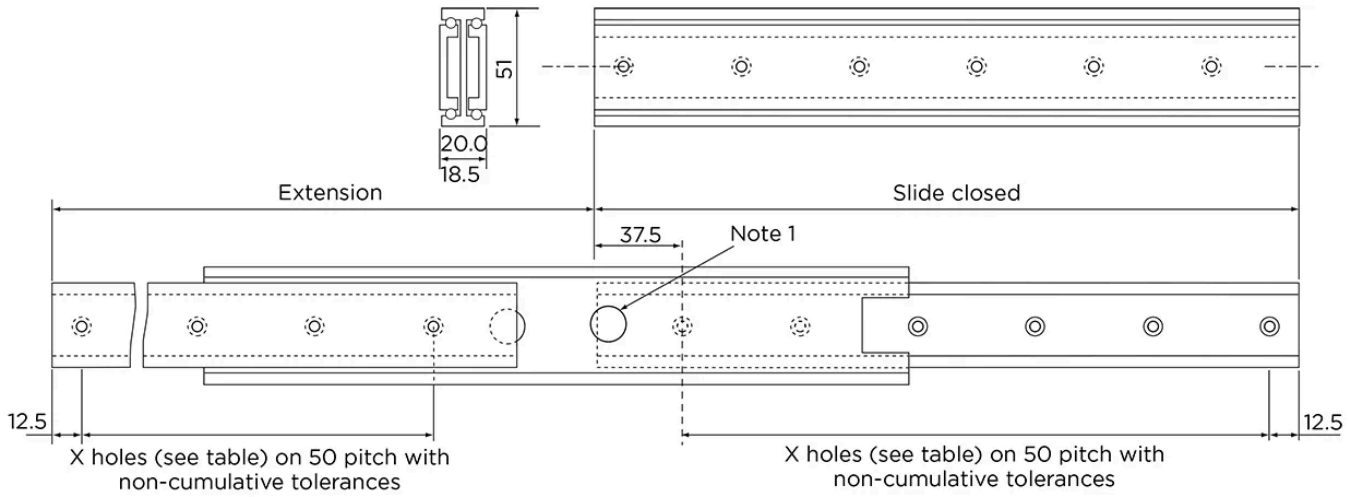


Note 1: 15 mm dia. holes in centre beam allow easy access to fixing holes. M5 countersunk head screws to BS4183 are recommended for fixing.

Note 2: Elongated holes should be provided in either the framework or chassis to give adjustment if it is necessary for the panel to fit tight against the framework.

| Designation | Closed Length | Extension Length | System Load Capacity (N) | Number of Fixing Holes | Weight/pc (kg) |
|---|---|---|---|---|---|
| **210-300** | 300 | 330 | 550 | 6 | 0.46 |
| **210-350** | 350 | 380 | 620 | 7 | 0.53 |
| **210-400** | 400 | 430 | 710 | 8 | 0.62 |
| **210-450** | 450 | 480 | 780 | 9 | 0.71 |
| **210-500** | 500 | 530 | 840 | 10 | 0.78 |
| **210-550** | 550 | 580 | 880 | 11 | 0.86 |
| **210-600** | 600 | 630 | 900 | 12 | 0.94 |


Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.