

Table of contents

- **210 Non Lock - 100% Extension**
- **220 (Left) & 230 (Right) Lock in / Lock out - 100% Extension**
- **410 - 100% Extension**

210 Non Lock - 100% Extension

A precision ball bearing slide with smooth movement combined with good load carrying capacity. All aluminium slide.

A row of ball bearings in each track, concealed in nylon cages, ensures smooth and easy operation. Carrying loads up to 90 kg per pair.

Standard lengths 300 to 600 mm in 50 mm increments.

All dimensions in mm.

System Load Capacity value refers to a pair of rails at full extension.

Note 1: 15 mm dia. holes in centre beam allow easy access to fixing holes. M5 countersunk head screws to BS4183 are recommended for fixing.


Note 2: Elongated holes should be provided in either the framework or chassis to give adjustment if it is necessary for the panel to fit tight against the framework.

Material: Aluminium with steel ball bearings, standard anodizing finish silver.

Extension: 100%



General Data

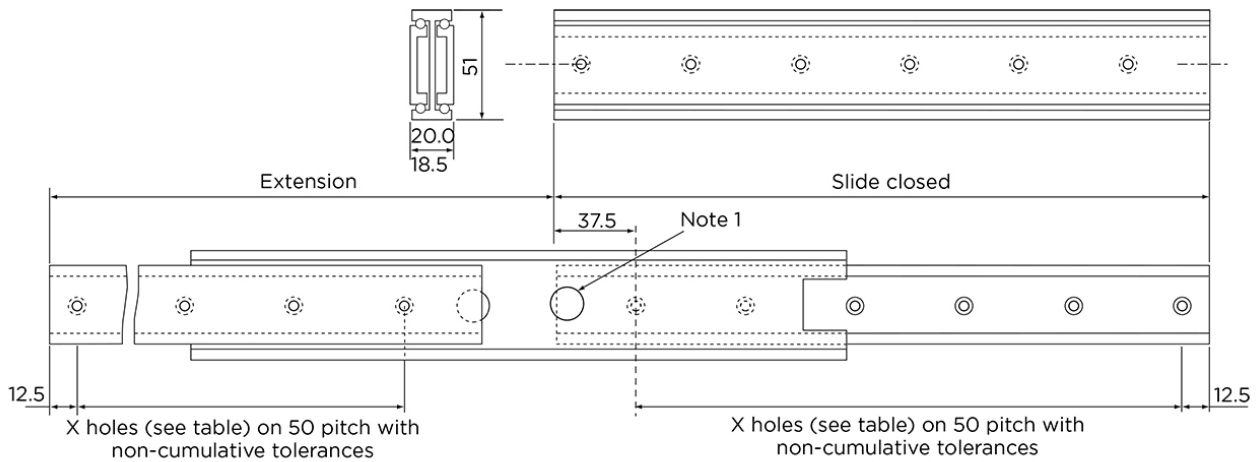

Note 1: 15 mm dia. holes in centre beam allow easy access to fixing holes. M5 countersunk head screws to BS4183 are recommended for fixing.

Note 2: Elongated holes should be provided in either the framework or chassis to give adjustment if it is necessary for the panel to fit tight against the framework.

Designation	Closed Length	Extension Length	System Load Capacity (N)	Number of Fixing Holes	Weight/pc (kg)
210-300	300	330	550	6	0.46
210-350	350	380	620	7	0.53
210-400	400	430	710	8	0.62
210-450	450	480	780	9	0.71
210-500	500	530	840	10	0.78
210-550	550	580	880	11	0.86
210-600	600	630	900	12	0.94

220 (Left) & 230 (Right) Lock in / Lock out - 100% Extension

The 220 (LH) & 230 (RH) are a pair of precision ball bearing slides with a complete integrated locking system. Automatically locked when the slide is fully extended and when fully closed. Slide smoothly and easily due to a row of ball bearings held in a nylon cage in each track. All aluminium slide. Carrying loads up to 90 kg per pair. Standard lengths 300 to 600 mm in 50 mm increments.

All dimensions in mm.

System Load Capacity value refers to a pair of rails.

Note 1: 15 mm dia. holes in centre allow easy access to fixing holes. M5 countersunk head screws to BS4183 are recommended for fixing.

Note 2: Elongated holes should be provided in either the framework or chassis to give adjustment if it is necessary for the panel to fit tight against the framework.


Material: Aluminium with steel ball bearings, standard anodizing finish silver.

Extension: 100%



General Data


220 (Left)

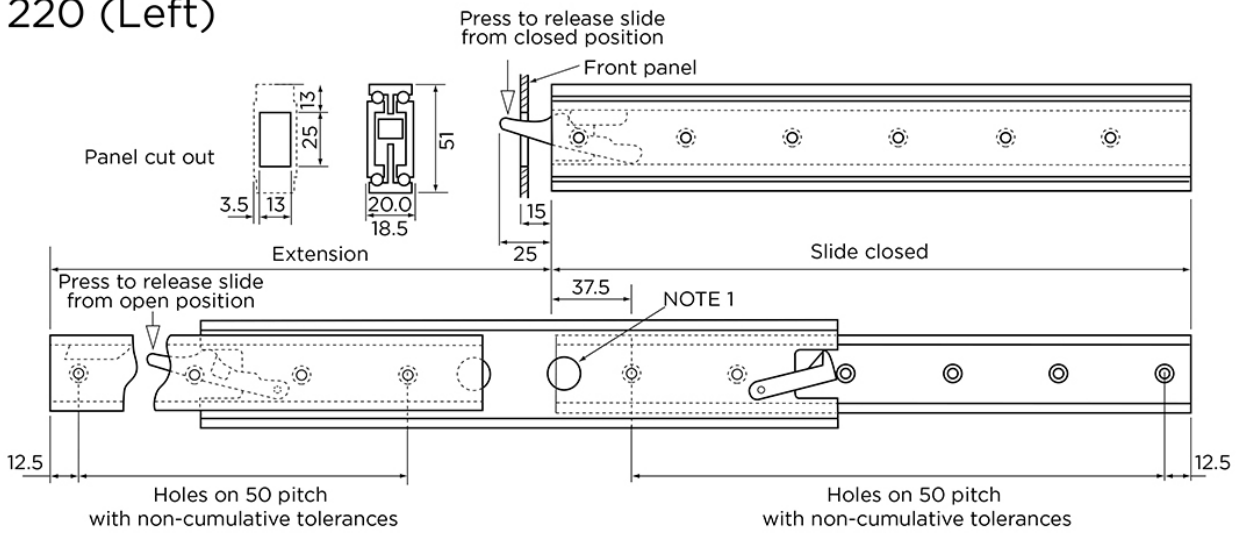

Note 1: 15 mm dia. holes in centre allow easy access to fixing holes. M5 countersunk head screws to BS4183 are recommended for fixing.

Note 2: Elongated holes should be provided in either the framework or chassis to give adjustment if it is necessary for the panel to fit tight against the framework.

230 (Right)

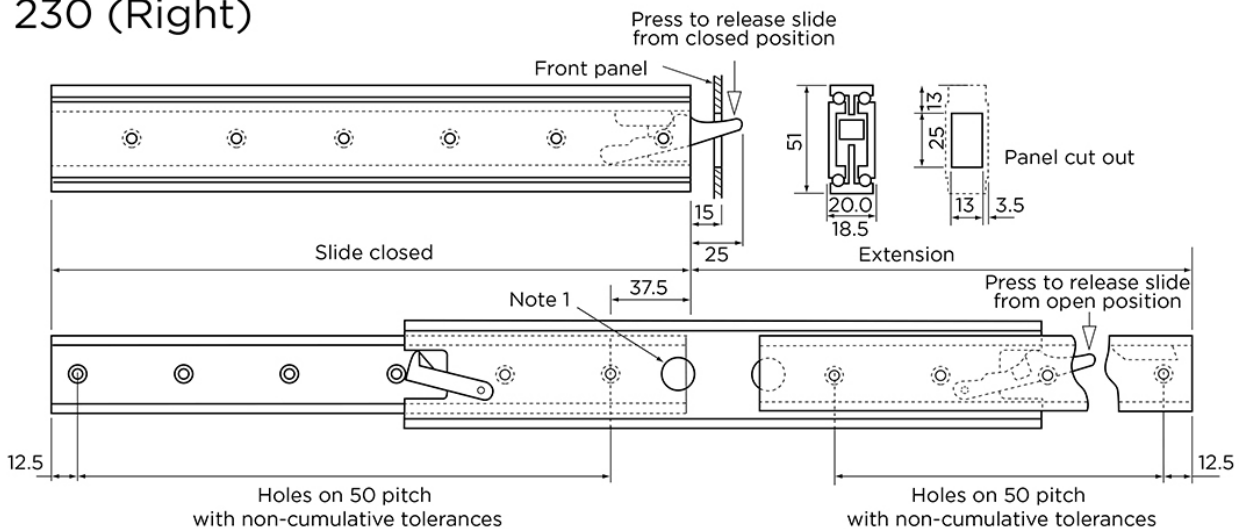

Note 1: 15 mm dia. holes in centre allow easy access to fixing holes. M5 countersunk head screws to BS4183 are recommended for fixing.

Note 2: Elongated holes should be provided in either the framework or chassis to give adjustment if it is necessary for the panel to fit tight against the framework.

Designation	Closed Length	Extension Length	System Load Capacity (N)	Number of Fixing Holes	Remark
220-300	300	330	550	6	Left
220-350	350	380	620	7	Left
220-400	400	430	710	8	Left
220-450	450	480	780	9	Left
220-500	500	530	840	10	Left
220-550	550	580	880	11	Left
220-600	600	630	900	12	Left

General Data

Designation	Closed Length	Extension Length	System Load Capacity (N)	Number of Fixing Holes	Remark
230-300	300	330	550	6	Right
230-350	350	380	620	7	Right
230-400	400	430	710	8	Right
230-450	450	480	780	9	Right
230-500	500	530	840	10	Right
230-550	550	580	880	11	Right
230-600	600	630	900	12	Right

Designation	Weight/pc (kg)
220-300	0.52
220-350	0.60
220-400	0.68
220-450	0.74
220-500	0.83
220-550	0.90
220-600	0.98
230-300	0.52
230-350	0.60
230-400	0.68
230-450	0.74
230-500	0.83
230-550	0.90
230-600	0.98

410 - 100% Extension

An all aluminium 3 beam slide extending up to 100%.
Carrying loads up to 340 kg per pair.
Standard lengths 300 to 1000 mm in 50 mm increments.
Lightweight Slide 6,5 kg/meter per pair with a compact profile. 70% lighter than comparable steel slides.

All dimensions in mm.

System Load Capacity value refers to a pair of rails.


Note: 18 mm dia. holes in centre beam allow easy access to fixing holes. M8 countersunk head screws to BS4183 are recommended for fixing.

Material: Aluminium with polymer ball bearings, standard anodizing finish silver.

Extension: 100%



General Data

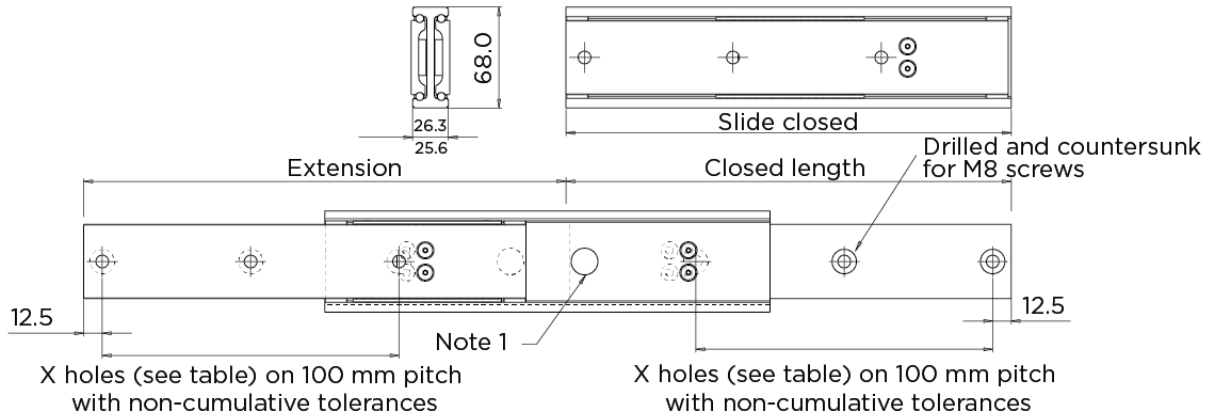

Note: 18 mm dia. holes in centre beam allow easy access to fixing holes.
 M8 countersunk head screws to BS4183 are recommended for fixing.

Designation	Closed Length	Extension Length	System Load Capacity (N)	Number of Fixing Holes	Weight/pc (kg)
410-300	300	325	2900	3	0.975
410-350	350	375	3000	4	1.1375
410-400	400	425	3100	4	1.3
410-450	450	475	3200	5	1.46
410-500	500	525	3300	5	1.625
410-550	550	575	3400	6	1.787
410-600	600	625	3400	6	1.95
410-650	650	675	3300	7	2.113
410-700	700	725	3200	7	2.275
410-750	750	775	3100	8	2.437
410-800	800	825	3000	8	2.6
410-850	850	875	3000	9	2.763
410-900	900	925	2800	9	2.925
410-950	950	975	2700	10	3.088
410-1000	1000	1025	2500	10	3.25