

Tracking Guides

This profile is used as a tracking guide. It is longitudinally applied on the running side of a belt, mainly in applications where transversal forces occur.


Highly flexible V-shaped notched PVC-profile running over pulleys with a specifically shaped groove.

Profiles are applied to the belt using hot air welding or glue.

Dimensions in mm.



Variant Data

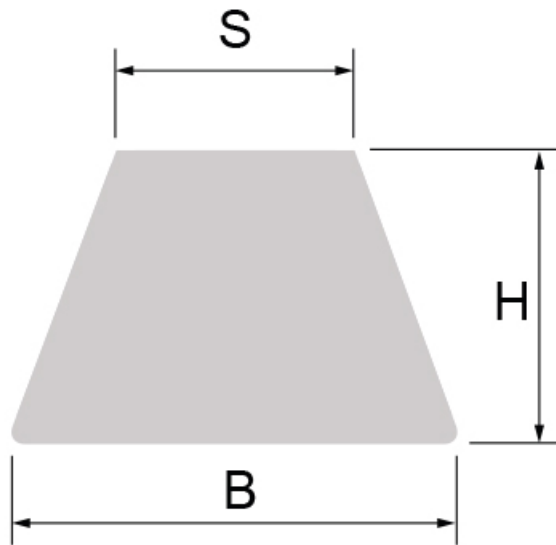

| Designation | Code | Material | B | H | S |
|-------------|------|----------|----|---|---|
| K6 | 1 | TPU | 6 | 4 | 4 |
| Kn8 | 2 | TPU | 8 | 5 | 5 |
| Kn10 | 3 | TPU | 10 | 6 | 6 |

| Designation | Weight (kg/m) | ∅ |
|-------------|---------------|---------|
| K6 | 0.03 | Min. 40 |
| Kn8 | 0.04 | Min. 40 |
| Kn10 | 0.06 | Min. 40 |