

## Tracking Guides

This profile is used as a tracking guide. It is longitudinally applied on the running side of a belt, mainly in applications where transversal forces occur.


Highly flexible V-shaped notched PVC-profile running over pulleys with a specifically shaped groove.

Profiles are applied to the belt using hot air welding or glue.

Dimensions in mm.



## General Data

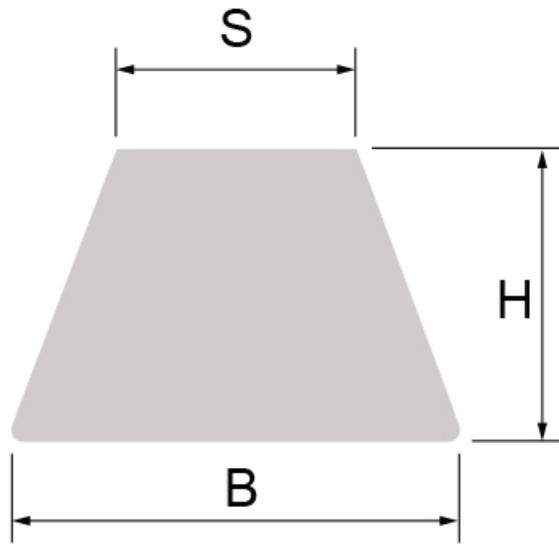

Designation	Code	Material	B	H	S
<b>K6</b>	1	TPU	6	4	4
<b>Kn8</b>	2	TPU	8	5	5
<b>Kn10</b>	3	TPU	10	6	6

Designation	Weight (kg/m)	ø
<b>K6</b>	0.03	Min. 40
<b>Kn8</b>	0.04	Min. 40
<b>Kn10</b>	0.06	Min. 40