

T-Nuts, ball-type, push-in, flat


Application:

T-nut for swiveling into the t-slot. Fits into the t-slot at any point. Held in position by a spring-loaded ball.

Material: Steel, zinc-plated

System: 40 - Slot 8

Type: T-nuts

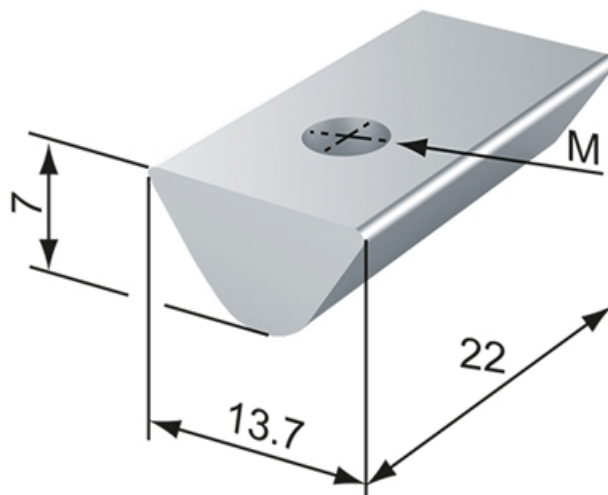

T-Nuts, slide-in



T-Nuts, push-in



T-Slot Strength

Information in regards to the maximum allowable t-slot load capability F. These values already include a safety factor ($S > 2$) against plastic deformation.

| Profile type | Max. pull charge F |
|--------------|--------------------|
| standard | 5000 N |
| double br. | 3250 N |
| semi | 2500 N |
| light | 2000 N |
| superlight | 1750 N |



General Data

| Designation | System | Thread | Weight (g) |
|-------------|-------------|--------|------------|
| PN1030 | 40 - Slot 8 | M4 | 11 |
| PN1035 | 40 - Slot 8 | M5 | 11 |
| PN1040 | 40 - Slot 8 | M6 | 10 |
| PN1045 | 40 - Slot 8 | M8 | 9 |