

T-Nuts, push-in


Application:

T-nut for swiveling into the t-slot. Fits into the t-slot at any point. Held in position by a grub screw. Raised area fits into the t-slot to stop twisting.

Material: Steel, zinc-plated

System: 40 - Slot 8

Type: T-nuts

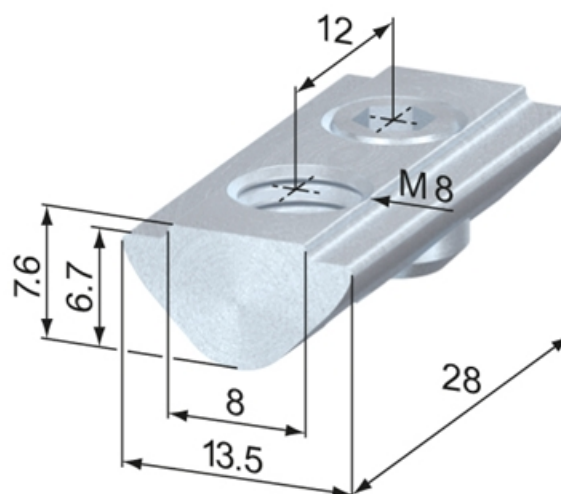

T-Nuts, slide-in



T-Nuts, push-in



T-Slot Strength

Information in regards to the maximum allowable t-slot load capability F. These values already include a safety factor ($S > 2$) against plastic deformation.

Profile type	Max. pull charge F
standard	5000 N
double br.	3250 N
semi	2500 N
light	2000 N
superlight	1750 N



General Data

Designation	System	Thread	Weight (g)
SV2150V	40 - Slot 8	M5	14
SV2151V	40 - Slot 8	M6	14
SV2152V	40 - Slot 8	M8	12