


## T-Nuts, steel / plastic

**Application:**

T-nut for swiveling into the t-slot. Fits into the t-slot at any point. Held in position by a spring-loaded ball. Raised area fits into groove to stop twisting.

**Material:** Plastic t-nut with steel insert  
**System:** 40

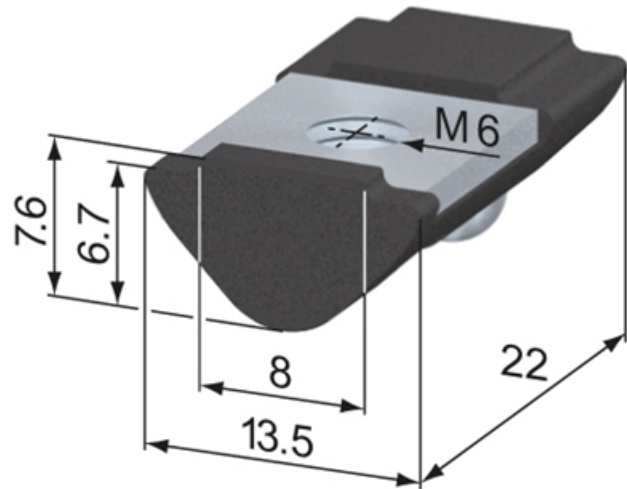

T-Nuts, slide-in



T-Nuts, push-in



**T-Slot Strength**

Information in regards to the maximum allowable t-slot load capability F. These values already include a safety factor (S > 2) against plastic deformation.

Profile type	Max. pull charge F
standard	5000 N
double br.	3250 N
semi	2500 N
light	2000 N
superlight	1750 N



## General Data

Designation	Thread	Weight (g)
SV2145S	M3	4
SV2146S	M4	4
SV2147S	M5	4
SV2148S	M6	4