Central Fastener 40 SVL

Application:
Special applications. The slide-in anchor, with an anti-twist feature, can be fixed in the profile t-slot at any point. The anchor is held in position by a spring-loaded ball in the opposing profile t-slot. Can be used for parallel and transverse connections.

Assembly:
Bore hole for the barrel housing: Ø 12 mm, 20 mm from profile end, 30 mm deep.
Bore for anchor in the profile: Ø 8.5 mm, 20 mm from profile end, 25 mm deep.

Material: Steel, zinc-plated
System: 40 - Slot 8
Type: Fasteners

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

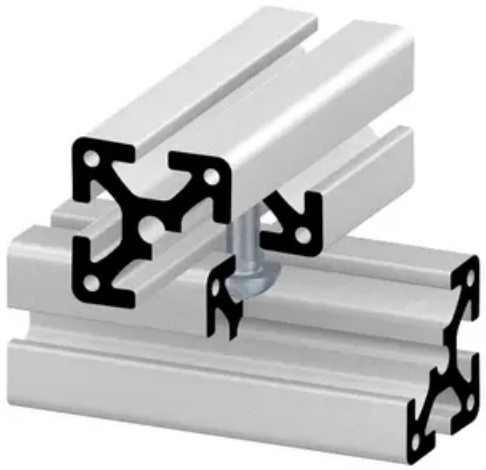

General Data

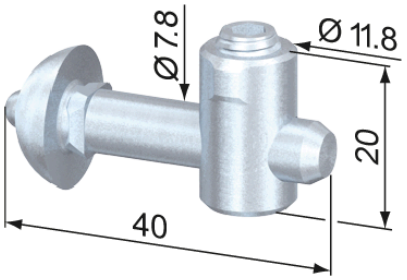

Designation	Description	System	Weight (g)
RF1157	Central Fastener 40 SVL	40 - Slot 8	31

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.