

## Rollers, POM


### Application:

The ball bearing roller is guided into the profile t-slot and can be used for flexible attachments of panel elements. Because of its asymmetrical construction, distances between the panel and profile can be adjusted.


**Material:** POM (polyoxymethylene), black

**System:** 40 - Slot 8


**Type:** System Gliders and Rollers



SZ2210S

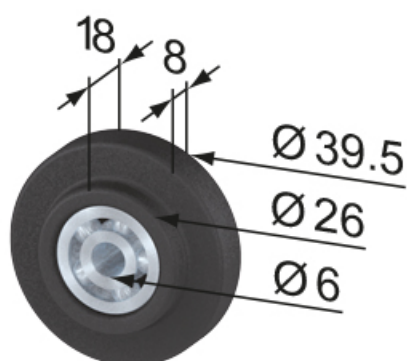

SZ2220S



SZ2230S

## General Data

| Designation    | Description       | System      | Weight (g) |
|----------------|-------------------|-------------|------------|
| <b>SZ2210S</b> | Roller, POM, Ø 24 | 40 - Slot 8 | 35         |
| <b>SZ2220S</b> | Roller, POM, Ø 26 | 40 - Slot 8 | 35         |
| <b>SZ2230S</b> | Roller, POM, Ø 29 | 40 - Slot 8 | 28         |