## ROLLCO LINEAR SOLUTIONS YOUR WAY

## Hinges 40

Application:

A medium to heavy load hinge for machines and protective guardings.


Supply: 2x anti-twist set screw


SZ0788V includes: 2x special t-nut 2x M8/spring-loaded ball 4x button head screw M8 x 18 4x washer Ø8 mm


Material: Aluminium, natural anodized, black anodized or GDZn (zinc die casting), black System: 40 - Slot 8 Type: Hinges










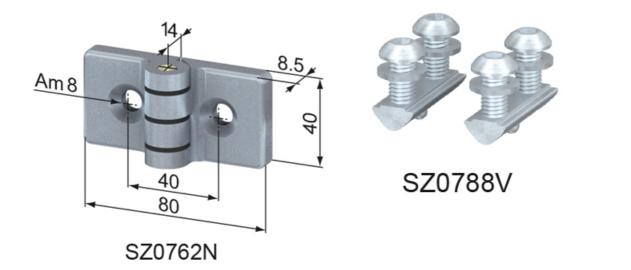

Rollco AB • Box 22234 • 250 24 Helsingborg • Sverige Tel. +46 42 15 00 40 • info@rollco.se • org.nr 556574-0353 Page Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice

## Hinges 40



Rollco AB • Box 22234 • 250 24 Helsingborg • Sverige Tel. +46 42 15 00 40 • info@rollco.se • org.nr 556574-0353 Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

## **General Data**

Designation	Description	System	Weight (g)
SZ0760N	Hinge 40, natural	40 - Slot 8	83
SZ0760S	Hinge 40, black	40 - Slot 8	84
SZ0761S	Hinge 40 GDZn, black	40 - Slot 8	190
SZ0762N	Hinge 40, with countersink Am 8	40 - Slot 8	104
SZ0788V	Fixing Set For Hinges 40	40 - Slot 8	68

Rollco AB • Box 22234 • 250 24 Helsingborg • Sverige Tel. +46 42 15 00 40 • info@rollco.se • org.nr 556574-0353 Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.