

## Cellulose





For highly stressed surfaces and panelling. Drilling and tapping in this material is possible. Resin bonded cellulose, hot pressed. Double sided surface coating. Further gauges and colours on request.

We offer a wide range of sheet materials and panels, ideal for building protective walls and doors, workstations etc. This is just a sample of our assortment.


Please contact us for further information about the various materials, specifications and designations. We will help you to find a suitable solution based on your application requirements.

**Material:** Cellulose

**System:** 40 - Slot 8; 30 - Slot 6; 20 - Slot 5

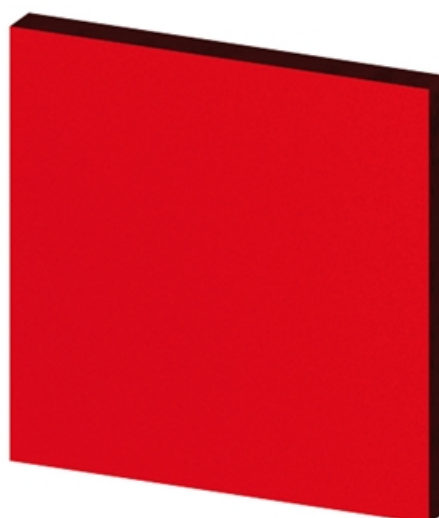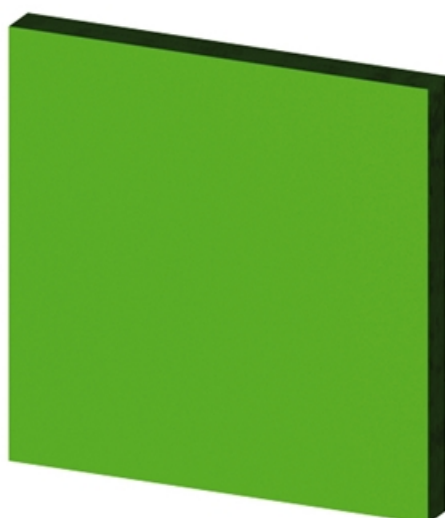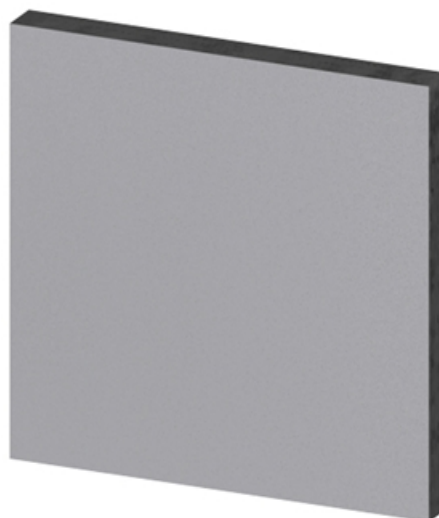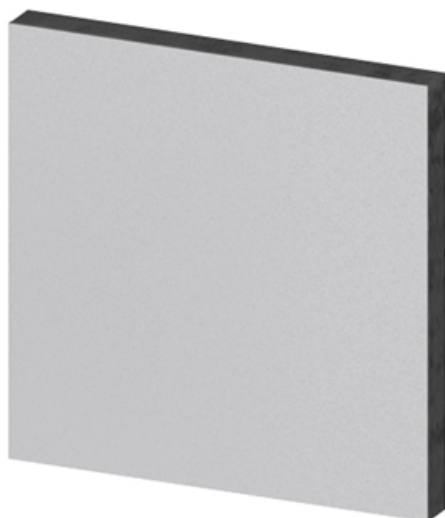

## Cellulose

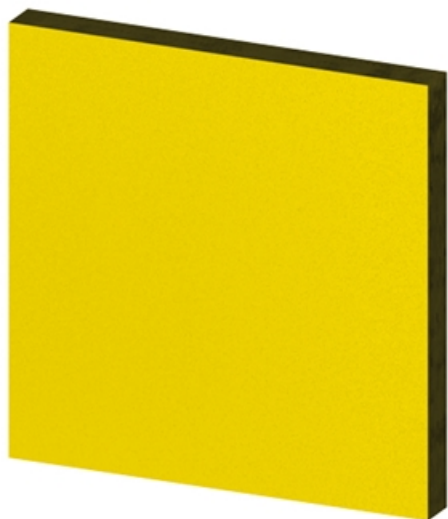

## General Data

Designation	Colour	Dimensions
Cellulose white	White	Max 2750 mm x 2020 mm
Cellulose light grey	Light grey	Max 2750 mm x 2020 mm
Cellulose grey	Grey	Max 2750 mm x 2020 mm
Cellulose green	Green	Max 2750 mm x 2020 mm
Cellulose red	Red	Max 2750 mm x 2020 mm
Cellulose yellow	Yellow	Max 2750 mm x 2020 mm
Cellulose blue	Blue	Max 2750 mm x 2020 mm