XUP---.0700

- Extra sustainable
- Extra exact
- Extra strong
- Extra long-lasting
- Chamber dimension tolerance 0,2 mm
- Max. loading pressure 1060 Mpa
- Elastic limit ≥ 550 Mpa
- Tensile strength 700 ... 900 Mpa
- Special machining on request
- Max length in one piece 8,8 m



Ordering example: XUP 070.0700-2800
U-Profile with inside measurement 74,1 mm, length 2800 mm

Dimensions in mm.


Material: 25 MnV5mod with plenty more load capacity
Sizes Available: 60; 70; 90; 110; 150

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

General Data

Designation	Weight (kg/m)
XUP060.0700	9.82
XUP070.0700	13.97
XUP090.0700	27.65
XUP110.0700	34.77
XUP150.0700	50.99

Dimensions

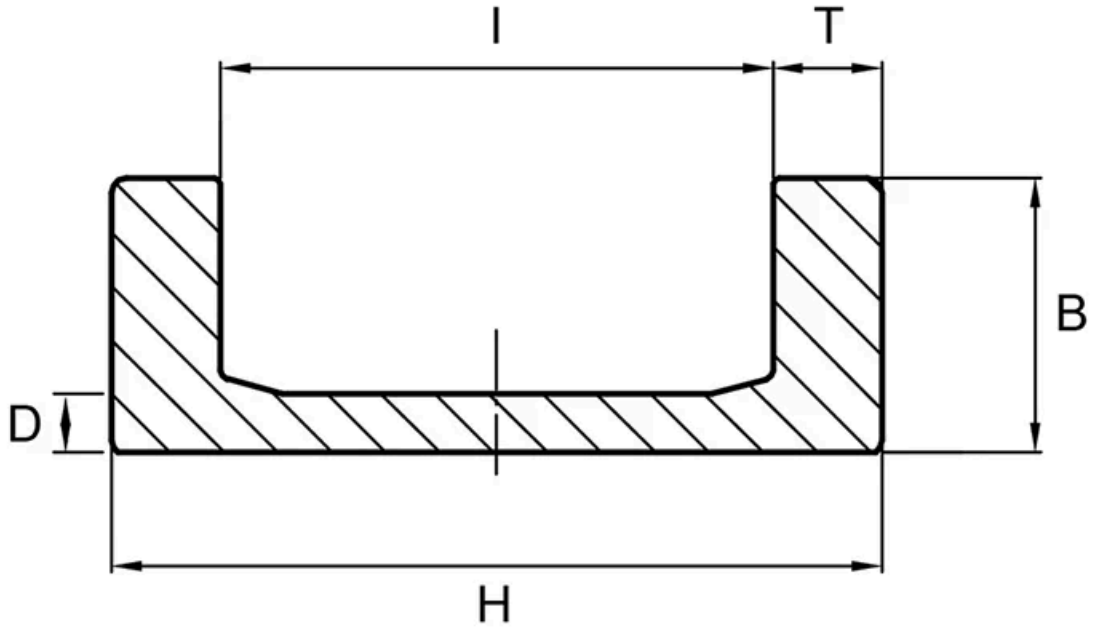

Designation	B	D	H	I	T
XUP060.0700	36	7 ±0.5	86.5	65.8 ±0.1	10.3 ±0.5
XUP070.0700	40 ±0.8	7.7 ±0.5	103.2	74.1 ±0.1	14.5 ±0.5
XUP090.0700	53 ±0.5	12.7 ±0.5	135.4	92.7 ±0.1	21.3 ±0.5
XUP110.0700	61.2 ±0.8	14 ±0.5	157.2	111.7 ±0.1	22.7 ±0.5
XUP150.0700	71.2 ±0.8	19.4 ±0.5	201.5	153.4 ±0.1	24 ±0.5

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.